


DC MOTOR


15W □70mm

DIMENSIONS

K7DS□□□

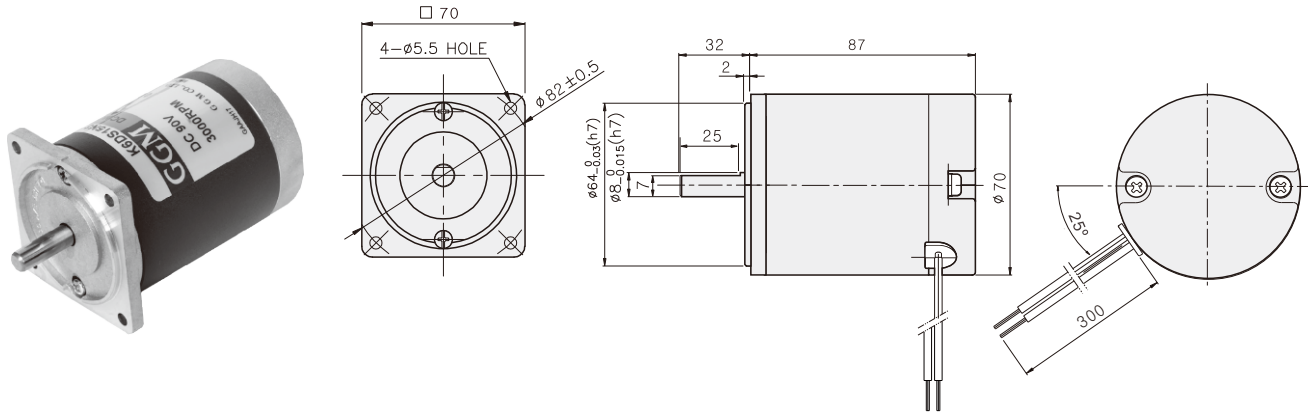

CONNECTION DIAGRAMS

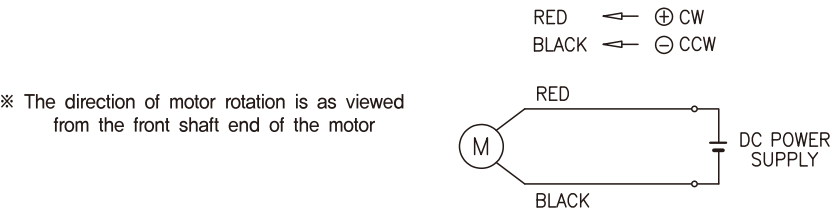

SPECIFICATIONS


Model	Output (W)	Voltage (V)	RATED			Start T. (N·m/kgf·cm)	Starting Current (A)
			Speed (rpm)	Torque (N·m/kgf·cm)	Current (A)		
K7D□15N1	15	12	3000	0.05/0.5	3.1	0.29/2.9	16
K7D□15N2		24			1.4	0.35/3.5	9
K7D□15N3		90			0.3	0.39/3.9	3

* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)



GEARHEAD

DIMENSIONS

DECIMAL GEARHEAD
K7G10BX

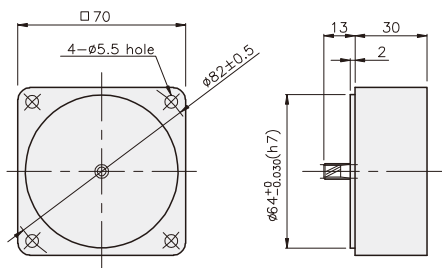



GEARHEAD
K7G□B(C)

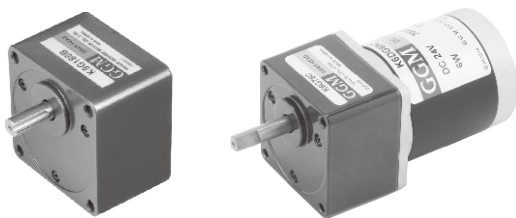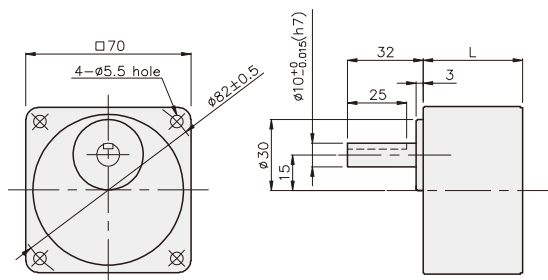

KEY SPEC

● KEY

● KEY GROOVE




DIMENSION TABLE

PART No	L	Application Model	Mounting BOLT
01	32	K7G3~18B(C)	M5 P0.8 X 50
02	42	K7G20~200B(C)	M5 P0.8 X 65
03	30	K7G10BX	M5 P0.8 X 90

WEIGHT

PART		WEIGHT(kg)
MOTOR		0.95
K7G10BX		0.32
GEAR HEAD	K7G3~18B(C)	0.38
	K7G20~40B(C)	0.46
	K7G50~200B(C)	0.51

K7DG15N□ + K7G□B(C)

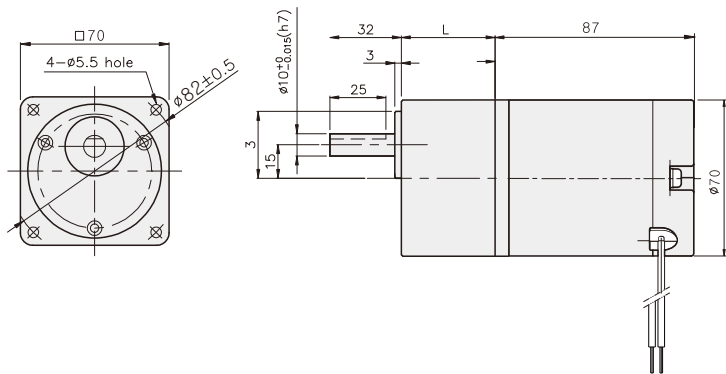

RATED TORQUE OF GEARHEAD

● K7G□B(C)

unit = above : N·m / below : Kgf·cm

Model Motor/ Gear head	Speed (rpm)	1000	833	600	500	400	333	300	240	200	167	150	120	100	83	75	60	50	40	33	30	25	20	17	15
		Ratio	3	3,6	5	6	7,5	9	10	12,5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
	K7DG15N□		0,12 1,2	0,14 1,4	0,20 2,0	0,24 2,4	0,30 3,0	0,36 3,6	0,39 3,9	0,49 4,9	0,59 5,9	0,71 7,1	0,71 7,1	0,89 8,9	1,07 10,7	1,28 12,8	1,42 14,2	1,60 16,0	1,92 19,2	2,40 24,0	2,88 28,8	3,20 32,0	3,83 38,3	4,79 47,9	5 50

- * Gearhead and decimal gearhead are sold separately.
- * The code in □ of gearhead model is for gear ratio.
- * color indicates that the output shaft of the geared motor rotates in the same direction as the output shaft of the motor, Others indicate rotation in the opposite direction.
- * If you are to have less ratio than the ratio in the table, you can install the decimal gearhead, which has one tenth of the ratio, between the gearhead and the motor. In this case, the permissible torque is 5N·m/50kgfcm.