


A photograph of a small, silver, cylindrical motor with a black shaft, mounted on a blue circular base. The motor has a label with text and a pink sticker. It is shown from a three-quarter perspective.

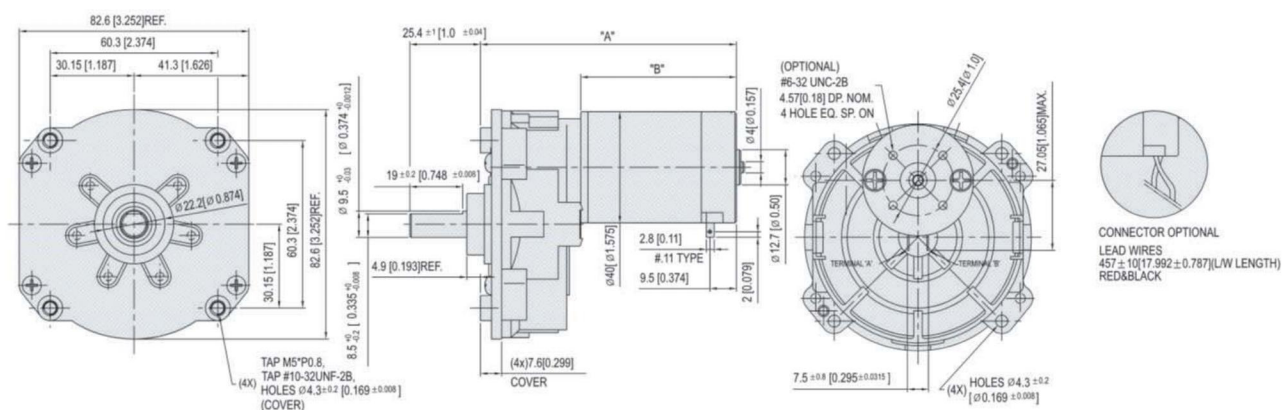

MODEL NO.	"A"	"B"
SP45□□□□	104,8 [4,126]	68,7 [2,705]
SP46□□□□	113,7 [4,476]	77,6 [3,055]

TYPE	GEAR RATIO	32.4	73.5	148.8	253	747.5	3105.2
SP42B□□□	No Load rpm	216.5	95.4	47.1	27.7	9.4	2.3
	N-m	0.37	0.84	1.53	2.60	6.92	11.27
	oz-in	52.5	118.9	216.8	368.6	980.0	1595.8
	kgf·cm	3.78	8.57	15.62	26.56	70.62	115.00
SP43B□□□	No Load rpm	185.0	81.5	40.3	23.7	8.0	1.9
	N-m	0.76	1.73	3.16	5.37	11.27	11.27
	oz-in	108.1	245.3	447.1	760.2	1595.8	1595.8
	kgf·cm	7.79	17.68	32.22	54.78	115.00	115.00
SP44B□□□	No Load rpm	189.8	83.7	41.3	24.3	8.2	2.0
	N-m	1.00	2.03	4.11	7.00	11.27	11.27
	oz-in	141.0	287.8	582.5	990.5	1595.8	1595.8
	kgf·cm	10.16	20.74	41.98	71.38	115.00	115.00
SP45B□□□	No Load rpm	195.9	86.4	42.7	25.1	8.5	2.0
	N-m	1.13	2.57	4.69	7.97	11.27	11.27
	oz-in	160.6	364.3	663.9	1128.7	1595.8	1595.8
	kgf·cm	11.57	26.25	47.84	81.34	115.00	115.00
SP46B□□□	No Load rpm	151.7	66.9	33.0	19.4	6.6	1.6
	N-m	1.57	3.57	6.51	11.06	11.27	11.27
	oz-in	222.9	505.7	921.3	1566.4	1595.8	1595.8
	kgf·cm	16.06	36.44	66.39	112.88	115.00	115.00

COMPACT TYPE PERMANENT MAGNET DC MOTOR | 13