




XD SERIES DC MOTOR
XA SERIES DC GEARED MOTOR



XD & XA SERIES

■ XD & XA SERIES

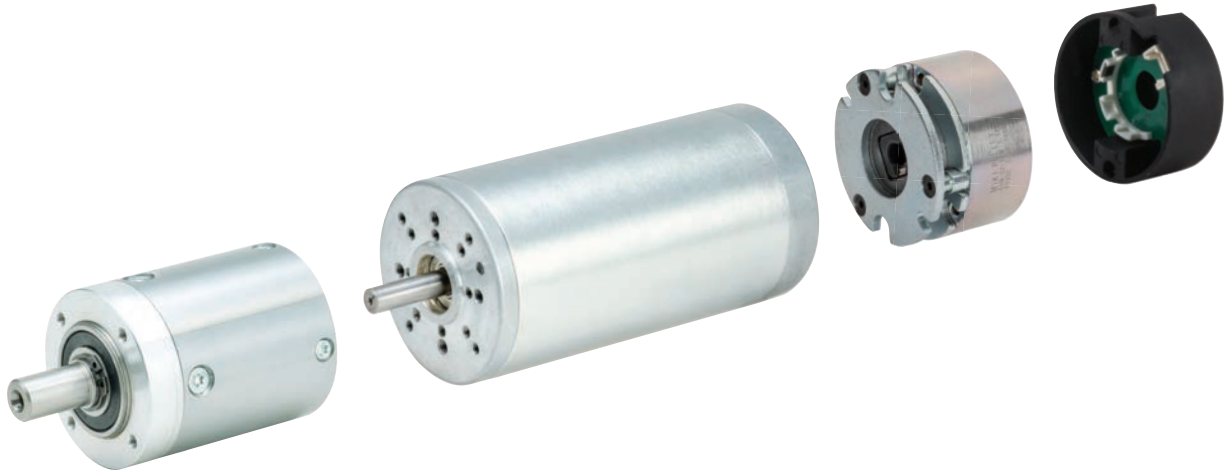


■ STANDARD FEATURE


- Planetary DC Geared motor
 - Compact & Robust design
 - High efficiency
 - Low noise
- All ball bearing
- Protection class : IP50(standard)
- Insulation class
 - F Class (155°C) : CCC, CE
 - B Class (130°C) : UL
- Special grease lubrication
- Ratio(i : 1) 3 to 710, other ratios on request
- Brake & Encoder can be added
- Certification : UL, CE, CCC

■ CODING SYSTEM


■ DC MOTOR

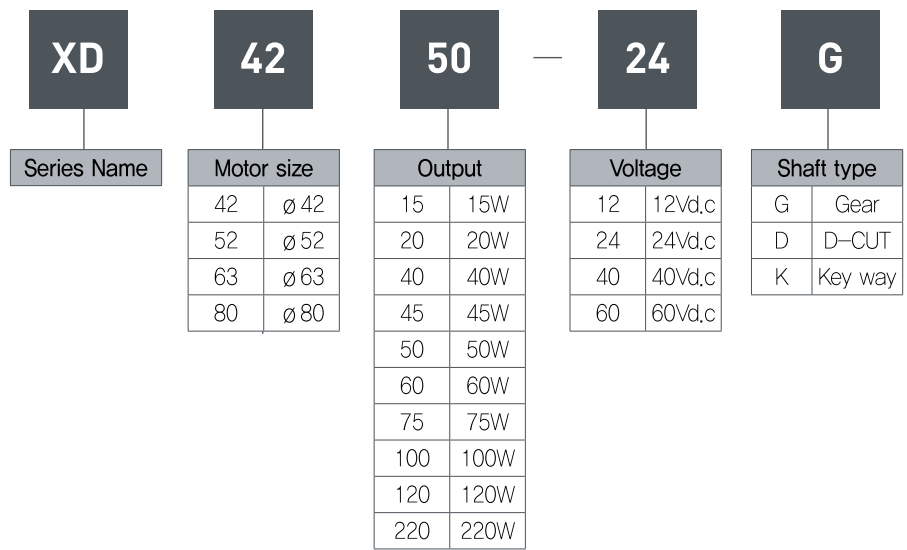

■ GEAR HEAD

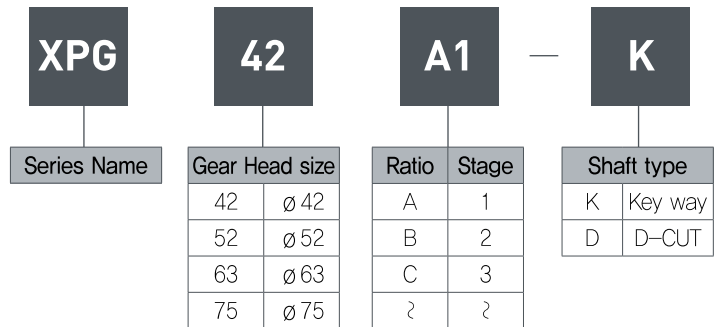


■ DC MOTOR AND GEAR HEAD COMBINATION

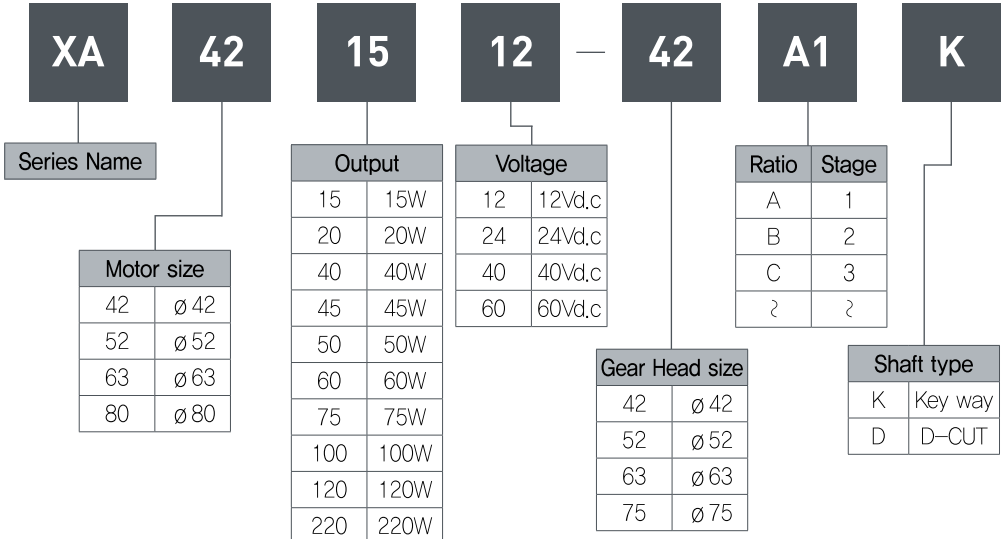

XD & XA SERIES


XD4215 Series DC Motor Dimension

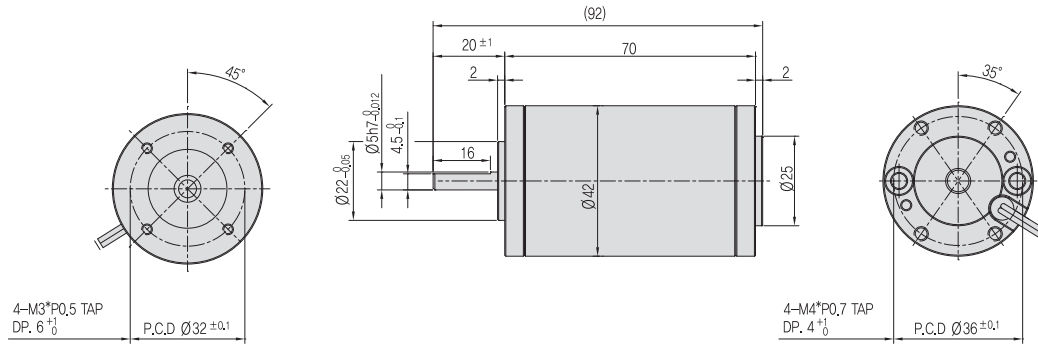


XD4215 Series DC Motor Data Sheet

Data	units	XD4215 Series		
Rated voltage	[Vd.c]	12	24	40
No load speed	[r/min]	4350	4200	4400
No load current	[A]	0,45	0,20	0,15
Rated torque	[kgf.cm]	0,44	0,44	0,41
	[Ncm]	4,3	4,3	4,0
Rated speed	[r/min]	3300	3300	3600
Rated current	[A]	1,85	0,95	0,55
Rated Output power	[W]	15	15	15
Stall torque	[kgf.cm]	2,05	2,18	2,14
	[Ncm]	20,1	21,4	21,0
Stall current	[A]	9,6	4,8	3,0
Demagnetization current	[A]	14	6,5	4,1
Weight	[kg]	0,37	0,37	0,37


XD4215-12 Characteristic diagram, 12Vd.c

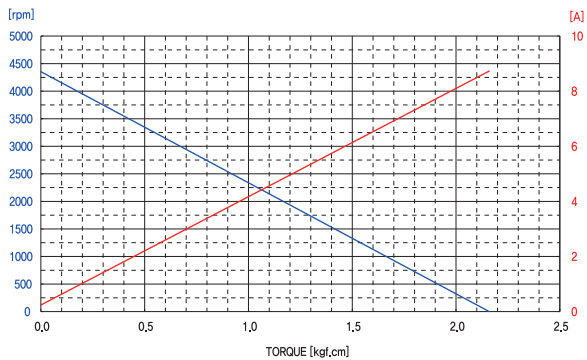


XD4215-24 Characteristic diagram, 24Vd.c

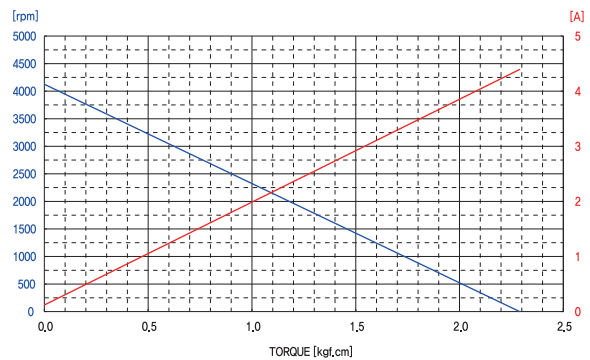

XD4215-40 Characteristic diagram, 40Vd.c

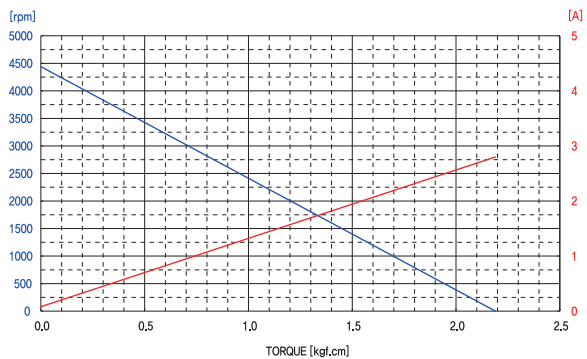


■ XD4220 Series DC Motor Dimension

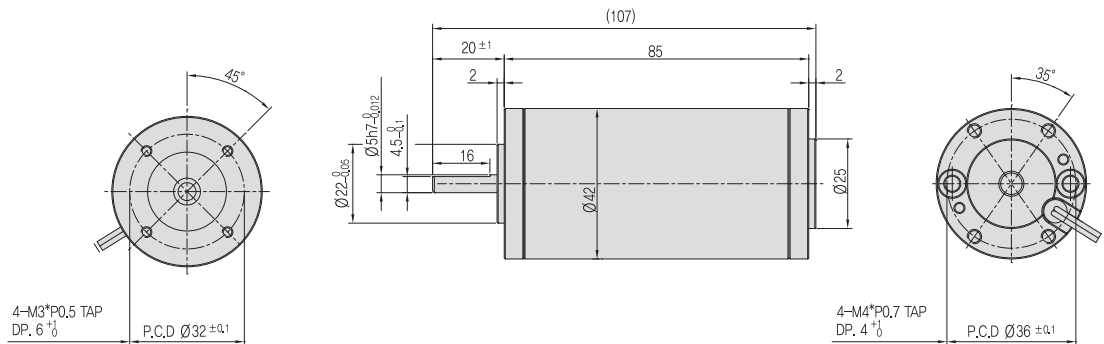


■ XD4220 Series DC Motor Data Sheet

Data	units	XD4220 Series		
Rated voltage	[Vd.c]	12	24	40
No load speed	[r/min]	4550	3800	3950
No load current	[A]	0.50	0.25	0.15
Rated torque	[kgf.cm]	0.52	0.66	0.59
	[Ncm]	5.1	6.5	5.8
Rated speed	[r/min]	3750	3000	3300
Rated current	[A]	2.30	1.20	0.70
Rated Output power	[W]	20	20	20
Stall torque	[kgf.cm]	3.75	3.52	3.63
	[Ncm]	36.8	34.5	35.6
Stall current	[A]	17.8	6.9	4.6
Demagnetization current	[A]	24	10.5	6.3
Weight	[kg]	0.48	0.48	0.48


■ XD4220-12 Characteristic diagram, 12Vd.c

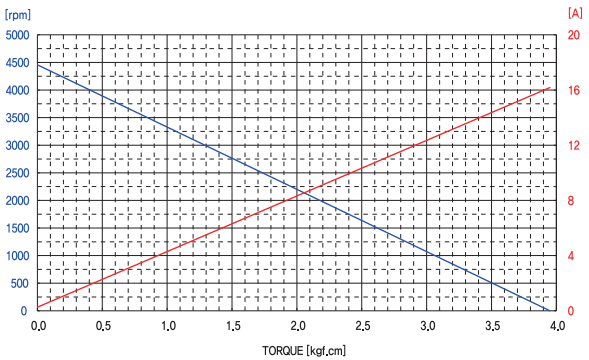

■ XD4220-24 Characteristic diagram, 24Vd.c

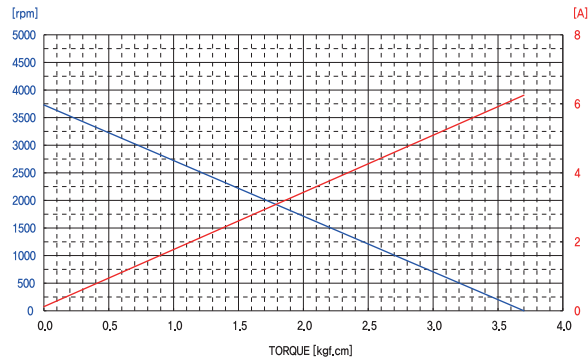


■ XD4220-40 Characteristic diagram, 40Vd.c

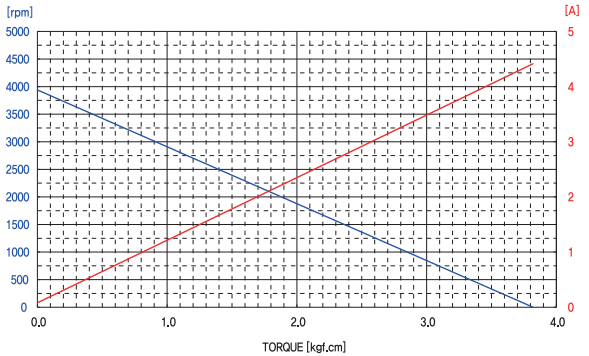

XD & XA SERIES


XD5240 Series DC Motor Dimension

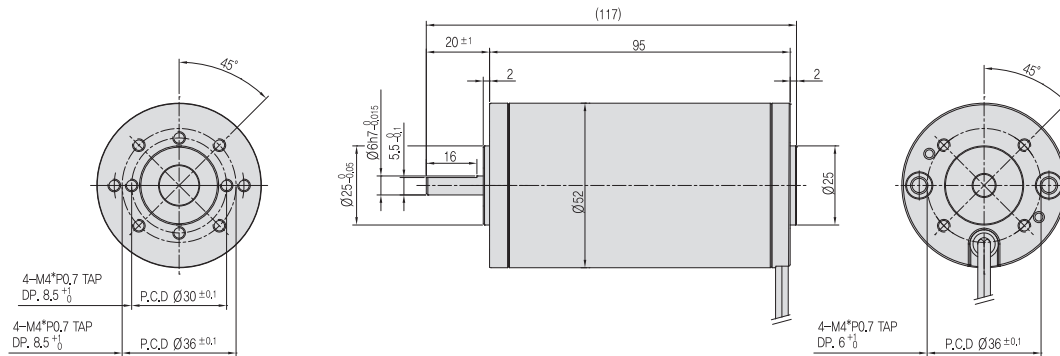


XD5240 Series DC Motor Data Sheet

Data	units	XD5240 Series			
		12	24	40	60
Rated voltage	[Vd.c]	12	24	40	60
No load speed	[r/min]	4500	4200	4300	4600
No load current	[A]	1.20	0.60	0.20	0.14
Rated torque	[kgf.cm]	1.04	1.08	1.07	0.97
	[Ncm]	10.2	10.6	10.5	9.5
Rated speed	[r/min]	3760	3600	3650	4000
Rated current	[A]	4.6	2.3	1.3	0.90
Rated Output power	[W]	40	40	40	40
Stall torque	[kgf.cm]	7.1	7.1	7.0	8.1
	[Ncm]	70.0	70.1	69.1	79.0
Stall current	[A]	34.0	15.8	9.5	7.7
Demagnetization current	[A]	42	20	12	8.5
Weight	[kg]	0.8	0.8	0.8	0.8


XD5240-12 Characteristic diagram, 12Vd.c

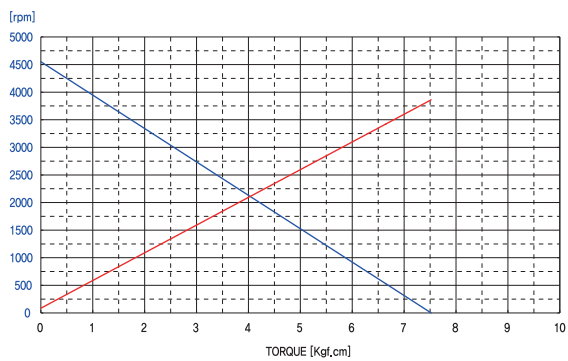


XD5240-24 Characteristic diagram, 24Vd.c

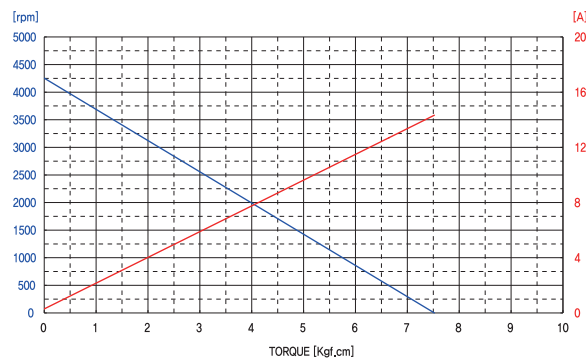


XD5240-40 Characteristic diagram, 40Vd.c

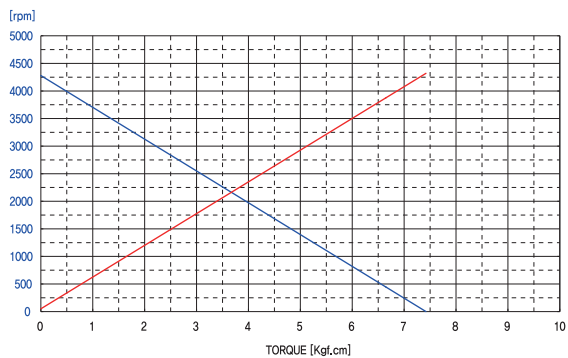

XD5240-60 Characteristic diagram, 60Vd.c

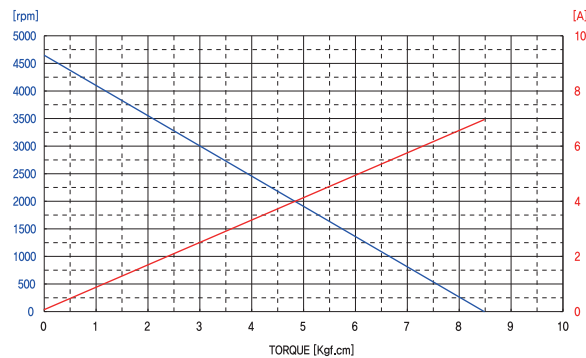


■ XD5260 Series DC Motor Dimension

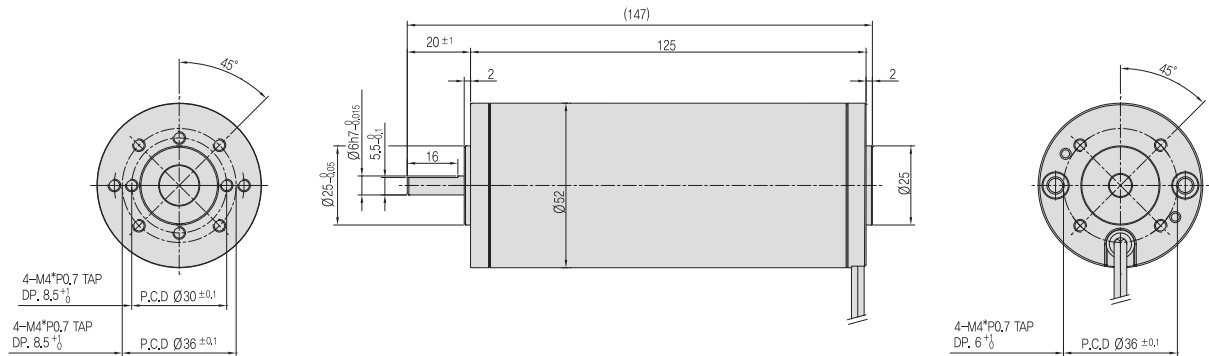


■ XD5260 Series DC Motor Data Sheet

Data	units	XD5260 Series			
Rated voltage	[Vd.c]	12	24	40	60
No load speed	[r/min]	3200	3250	3450	3600
No load current	[A]	1.20	0.60	0.35	0.25
Rated torque	[kgf.cm]	1.95	1.95	1.80	1.69
	[Ncm]	19.1	19.1	17.6	16.6
Rated speed	[r/min]	3000	3000	3250	3450
Rated current	[A]	6.60	3.00	1.80	1.20
Rated Output power	[W]	60	60	60	60
Stall torque	[kgf.cm]	12.5	15.7	17.9	18.1
	[Ncm]	122.7	153.8	175.3	177.8
Stall current	[A]	42.2	26.0	18.6	13.2
Demagnetization current	[A]	61	31	20	13.5
Weight	[kg]	1.15	1.15	1.15	1.15


■ XD5260-12 Characteristic diagram, 12Vd.c

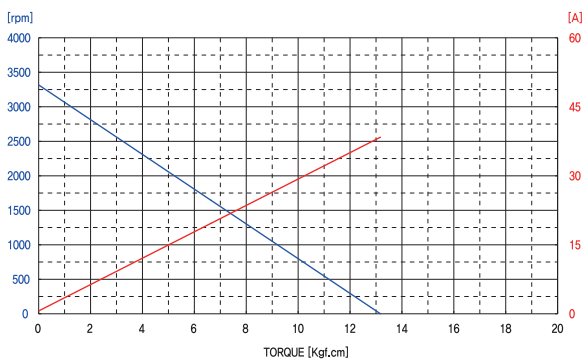


■ XD5260-24 Characteristic diagram, 24Vd.c

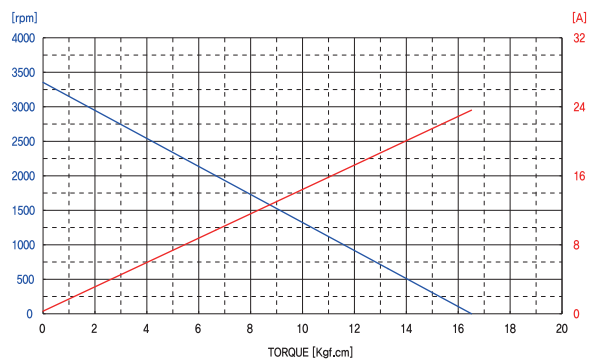

■ XD5260-40 Characteristic diagram, 40Vd.c

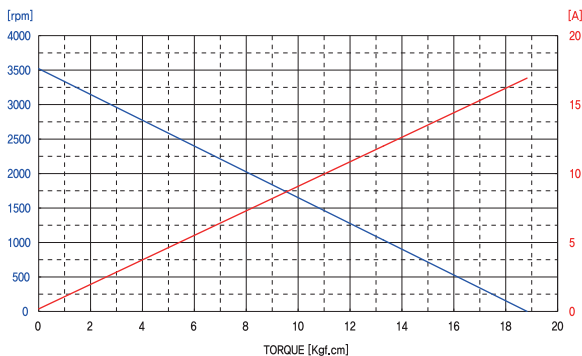


■ XD5260-60 Characteristic diagram, 60Vd.c

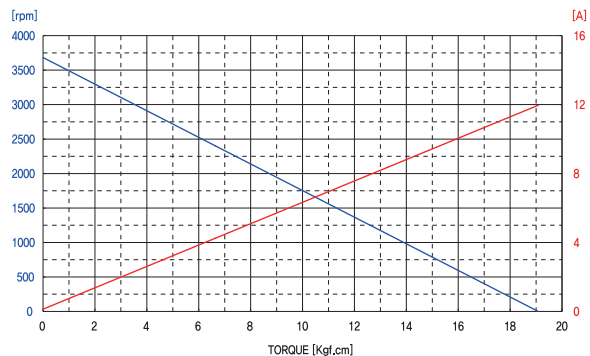

XD & XA SERIES


XD6350 Series DC Motor Dimension

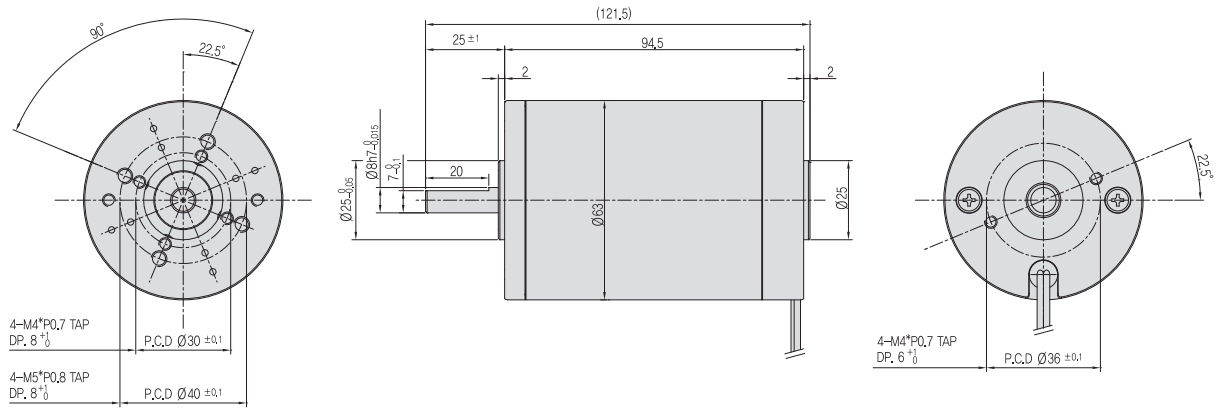


XD6350 Series DC Motor Data Sheet

Data	units	XD6350 Series			
		12	24	40	60
Rated voltage	[Vd.c]	12	24	40	60
No load speed	[r/min]	3600	3600	3800	3600
No load current	[A]	1.2	0.6	0.4	0.25
Rated torque	[kgf.cm]	1.41	1.52	1.41	1.50
	[Ncm]	13.9	14.9	13.8	14.7
Rated speed	[r/min]	3100	3200	3450	3250
Rated current	[A]	4.9	2.6	1.6	1.1
Rated Output power	[W]	45	50	50	50
Stall torque	[kgf.cm]	10.9	11.6	14.3	13.7
	[Ncm]	106.9	114.1	139.7	134.2
Stall current	[A]	39.6	22.5	17.5	10.8
Demagnetization current	[A]	50	24	16	9.5
Weight	[kg]	1.2	1.2	1.2	1.2


XD6345-12 Characteristic diagram, 12Vd.c

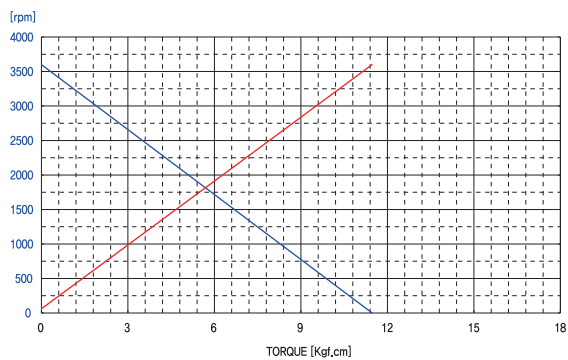


XD6350-24 Characteristic diagram, 24Vd.c

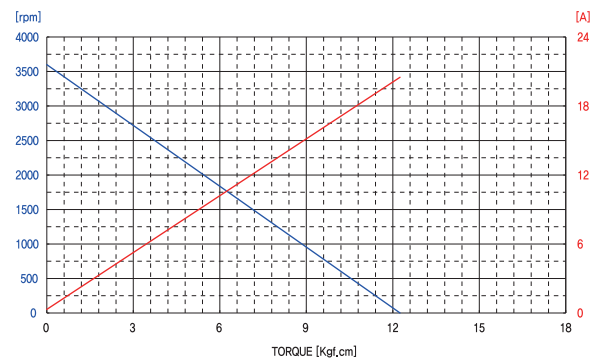


XD6350-40 Characteristic diagram, 40Vd.c

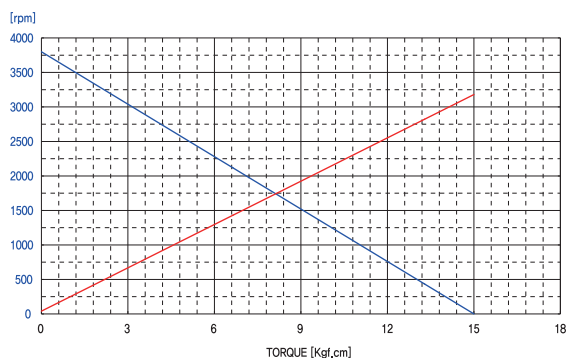

XD6350-60 Characteristic diagram, 60Vd.c

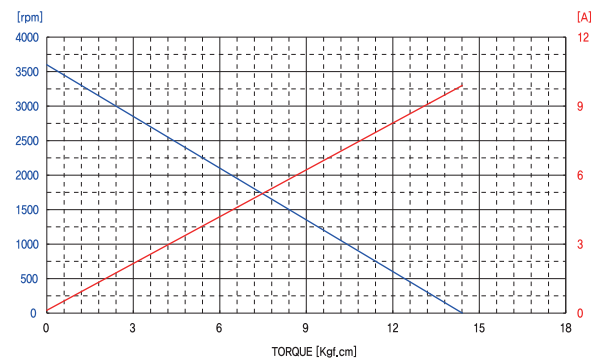


■ XD63100 Series DC Motor Dimension

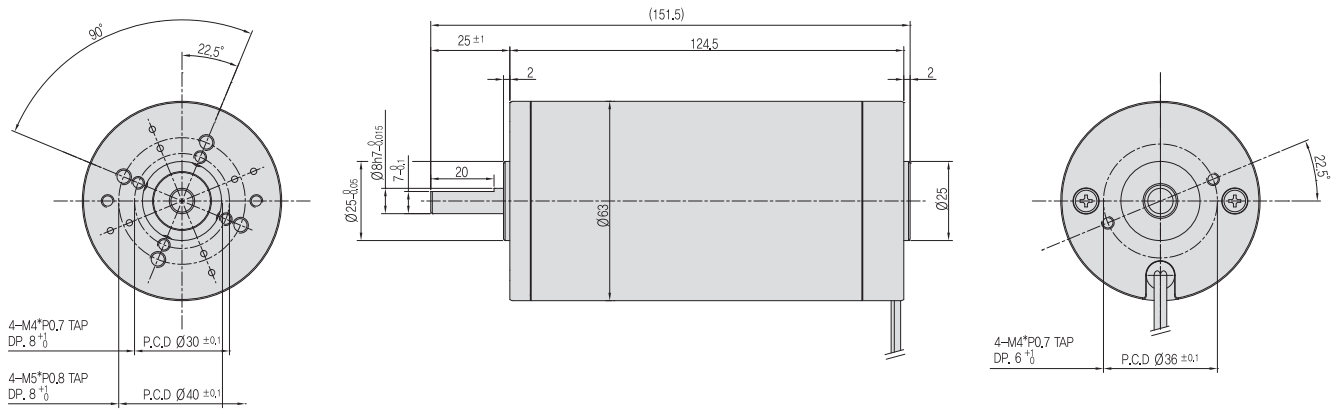


■ XD63100 Series DC Motor Data Sheet

Data	units	XD63100 Series			
		12	24	40	60
Rated voltage	[Vd.c]	12	24	40	60
No load speed	[r/min]	3500	3650	3600	3600
No load current	[A]	1.50	0.60	0.45	0.25
Rated torque	[kgf.cm]	2.32	3.00	3.09	3.04
	[Ncm]	22.7	29.4	30.3	29.8
Rated speed	[r/min]	3150	3250	3150	3200
Rated current	[A]	7.6	4.8	3.0	2.0
Rated Output power	[W]	75	100	100	100
Stall torque	[kgf.cm]	20.4	21.5	23.4	27.7
	[Ncm]	199.8	210.5	229.6	271.2
Stall current	[A]	77.0	40.0	25.9	20.4
Demagnetization current	[A]	66	33	20	13
Weight	[kg]	1.6	1.6	1.6	1.6


■ XD6375-12 Characteristic diagram, 12Vd.c

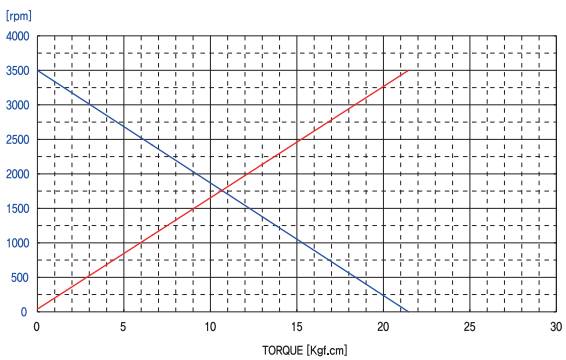


■ XD63100-24 Characteristic diagram, 24Vd.c

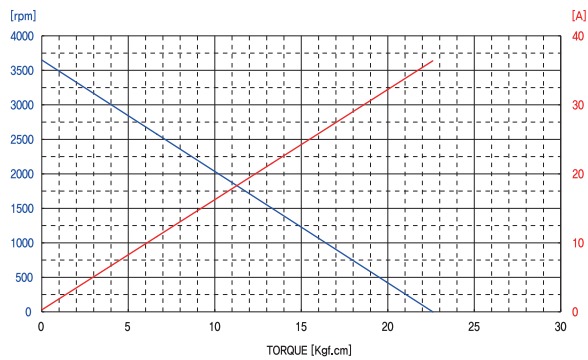

■ XD63100-40 Characteristic diagram, 40Vd.c

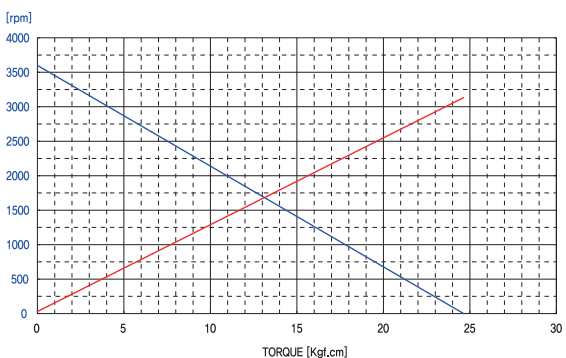


■ XD63100-60 Characteristic diagram, 60Vd.c

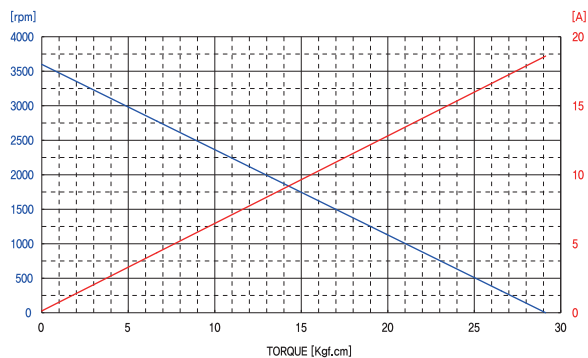

XD & XA SERIES


XD80120 Series DC Motor Dimension

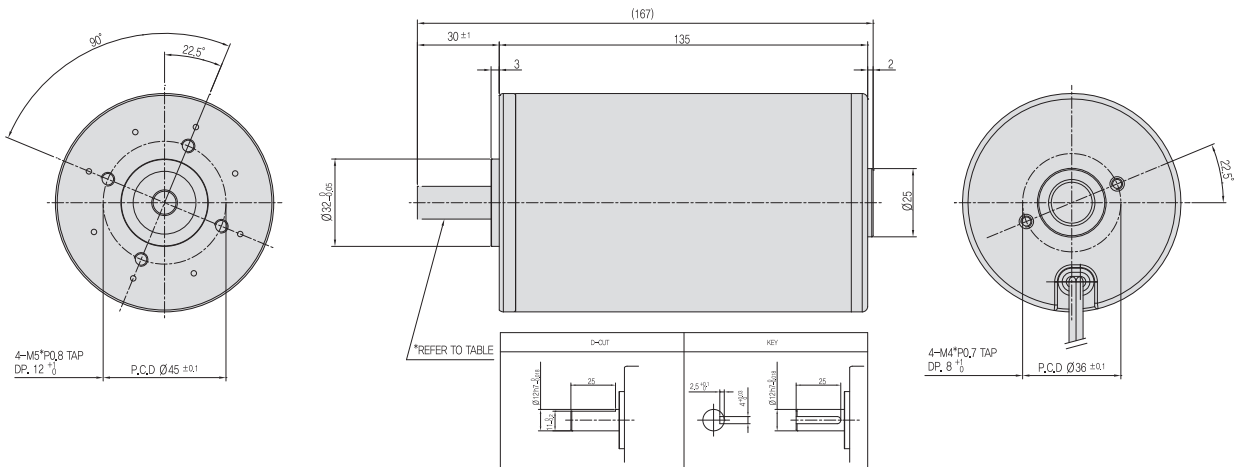


XD80120 Series DC Motor Data Sheet

Data	units	XD80120 Series			
Rated voltage	[Vd.c]	12	24	40	60
No load speed	[r/min]	3100	3200	3450	3400
No load current	[A]	2.5	1.8	1.2	0.6
Rated torque	[kgf.cm]	4.58	3.89	3.65	3.65
	[Ncm]	44.9	38.2	35.8	35.8
Rated speed	[r/min]	2550	3000	3200	3200
Rated current	[A]	13.0	6.2	3.9	2.5
Rated Output power	[W]	120	120	120	120
Stall torque	[kgf.cm]	28.8	41.8	43.8	48.9
	[Ncm]	282.2	409.5	429.3	479.5
Stall current	[A]	82.5	70.4	49.5	37.3
Demagnetization current	[A]	96	48	32	20
Weight	[kg]	2.7	2.7	2.7	2.7


XD80120-12 Characteristic diagram, 12Vd.c

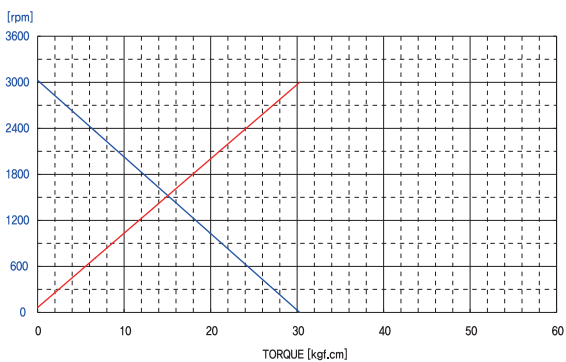


XD80120-24 Characteristic diagram, 24Vd.c

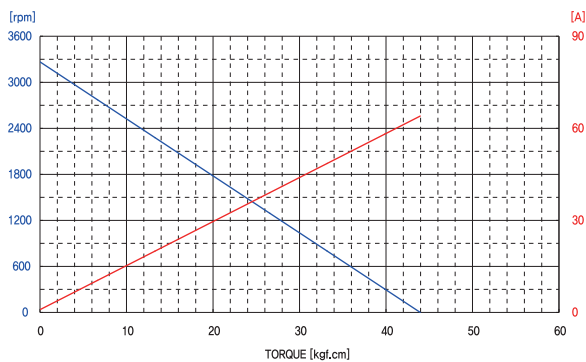


XD80120-40 Characteristic diagram, 40Vd.c

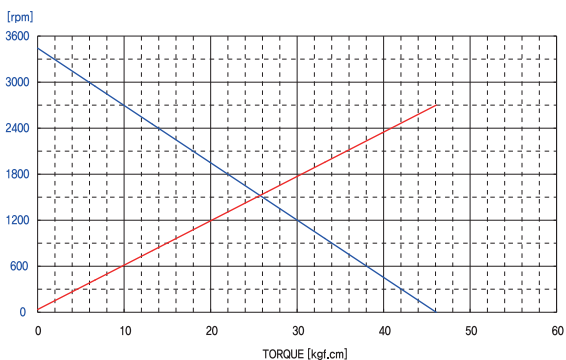

XD80120-60 Characteristic diagram, 60Vd.c

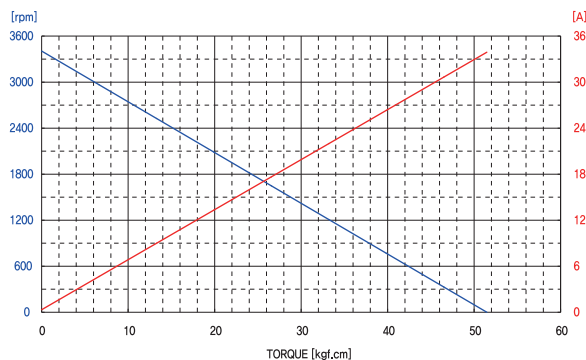


■ XD80220 Series DC Motor Dimension

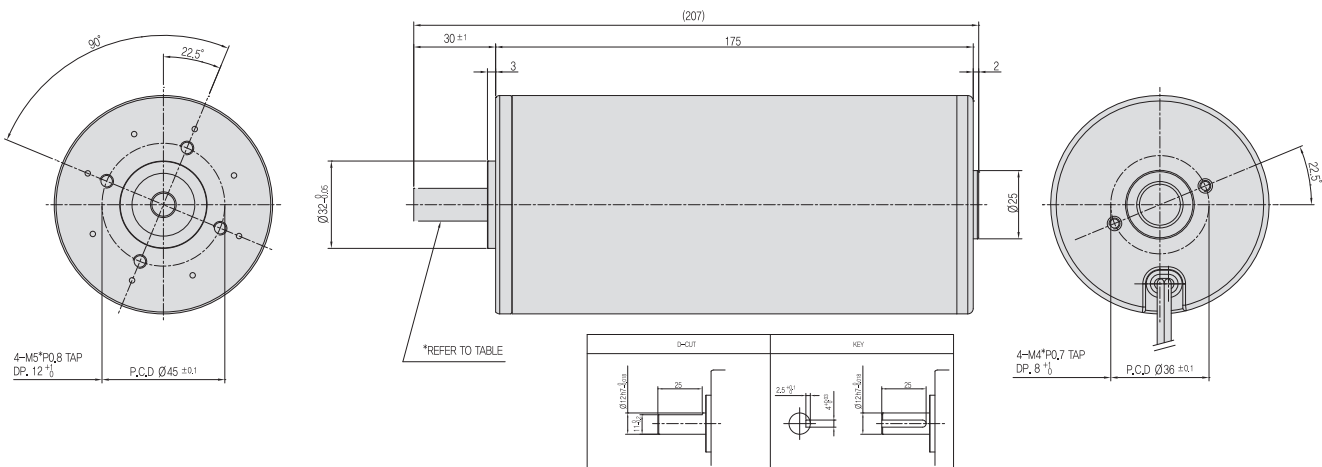


■ XD80220 Series DC Motor Data Sheet

Data	units	XD80220 Series		
Rated voltage	[Vd.c]	24	40	60
No load speed	[r/min]	3200	3000	3100
No load current	[A]	1.8	1.2	0.8
Rated torque	[kgf.cm]	7.39	7.39	7.14
	[Ncm]	72.4	72.4	70.0
Rated speed	[r/min]	2900	2900	3000
Rated current	[A]	11.2	6.3	4.2
Rated Output power	[W]	220	220	220
Stall torque	[kgf.cm]	77.2	96.5	97.2
	[Ncm]	756.7	945.9	953.2
Stall current	[A]	132.0	93.5	63.8
Demagnetization current	[A]	91	51	36
Weight	[kg]	3.75	3.75	3.75


■ XD80220-24 Characteristic diagram, 24Vd.c

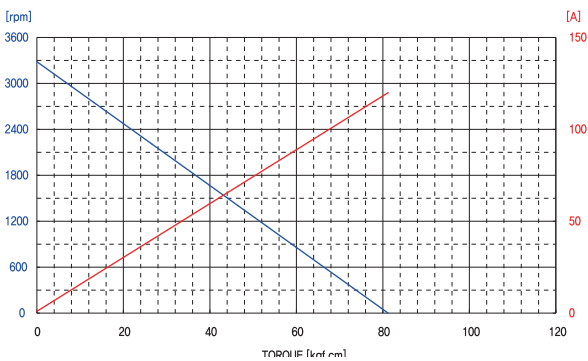

■ XD80220-40 Characteristic diagram, 40Vd.c

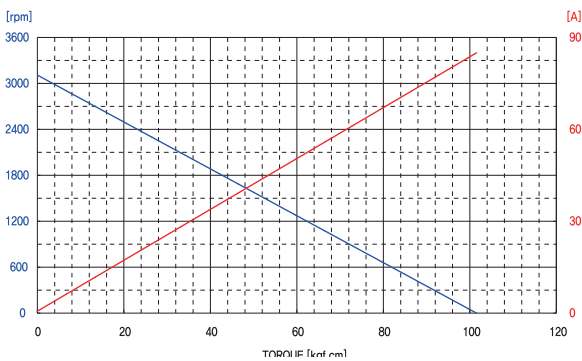

■ XD80220-60 Characteristic diagram, 60Vd.c

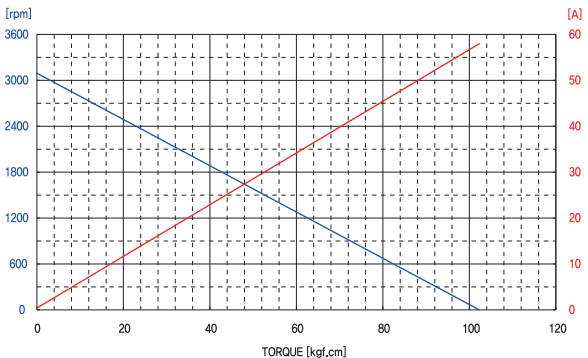

XD & XA SERIES

■ SPECIFICATION

■ GEAR HEAD



Model	Ratio		Number of stages	Continuous torque [Nm]	Permissible load [N]		Efficiency [%]	Weight [Kg]	
	(i : 1)	Coding			Axial	Radial			
XPG	42	4	A1	1	3,5(*0.9)	150	250	90	0.26
		6,25	B1						
		8	C1						
		16	A2						
		25	B2	2	6	150	250	81	0.36
		32	C2						
		50	D2						
		64	E2						
		100	A3	3	14	150	250	73	0.46
		128	B3						
		156	C3						
		200	D3						
		256	E3						
		312,5	F3						
400	G3								
512	H3								

* : plastic planet gears

Model	Ratio		Number of stages	Continuous torque [Nm]	Permissible load [N]		Efficiency [%]	Weight [Kg]	
	(i : 1)	Coding			Axial	Radial			
XPG	52	4,5	A1	1	4,5(*1.2)	500	350	90	0.58
		6,25	B1						
		8	C1						
		15	A2	2	8	500	350	81	0.7
		20,25	B2						
		28,12	C2						
		36	D2						
		50	E2	3	24	500	350	73	0.85
		64	F2						
		91,12	A3						
		126,5	B3						
		162	C3						
		225	D3						
		288	E3						
400	F3								
512	G3								

* : plastic planet gears

■ SPECIFICATION

■ GEAR HEAD


Model		Ratio				Number of stages	Continuous torque [Nm]	Permissible load [N]		Efficiency [%]	Weight [Kg]
		(i : 1)	Coding	(i : 1)	Coding			Axial	Radial		
XPG	63	3	A1	–	–	1	15(*5)	800	800	90	0.7
		4	B1	–	–						
		7	C1	–	–						
		10	D1	–	–						
		14,5	E1	–	–						
		16,8	A2	50	E2	2	70	800	800	81	1.2
		29,4	B2	60,9	F2						
		35	C2	70	G2						
		42	D2	101,5	H2						
		70,6	A3	250	G3	3	100	800	800	73	1.8
		84	B3	304,5	H3						
		100	C3	362,5	I3						
		147	D3	426,3	J3						
		175	E3	507,5	K3						
210	F3	710,5	L3								

* : plastic planet gears

Model		Ratio				Number of stages	Continuous torque [Nm]	Permissible load [N]		Efficiency [%]	Weight [Kg]
		(i : 1)	Coding	(i : 1)	Coding			Axial	Radial		
XPG	75	4	A1	–	–	1	25	1000	1000	90	1.5
		5,5	B1	–	–						
		7	C1	–	–						
		10	D1	–	–						
		14,5	E1	–	–						
		16,8	A2	42	F2	2	120	1000	1000	81	2.5
		23,1	B2	50	G2						
		27,5	C2	60,9	H2						
		29,4	D2	70	I2						
		35	E2	101,5	J2	3	160	1000	1000	73	3.6
		70,6	A3	250	H3						
		84	B3	304,5	I3						
		100	C3	362,5	J3						
		115,5	D3	426,3	K3						
147	E3	507,5	L3								
175	F3	710,5	M3								
210	G3	–	–								

XD & XA SERIES

DIMENSIONS

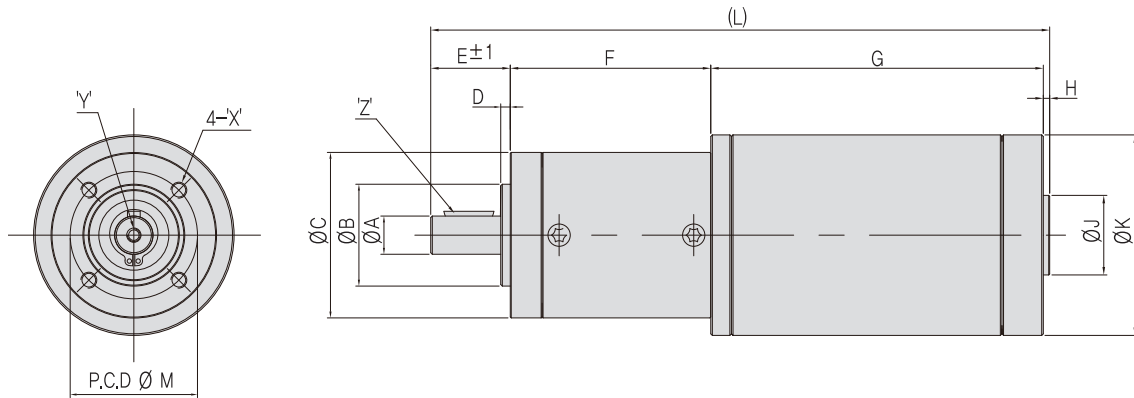


* Unit : [mm]

ITEM	XPG42+XD42		XPG52+XD52		XPG52+XD63		XPG63+XD63		XPG75+XD80		
A	Ø8	+0.007 +0.001	Ø12	+0.008 +0.003	Ø12	+0.008 +0.003	Ø15 h7		Ø19 h7		
B	Ø25	0 -0.052	Ø32	0 -0.039	Ø32	0 -0.039	Ø40	0 -0.011	Ø50	+0.011 -0.050	
C	Ø42		Ø52		Ø52		Ø63		Ø75		
D	2		3		3		2.5		5		
E	25		25		25		32		49		
F	1stage	39.8	47.5		47.5		62.2		80.7		
	2stage	52.1	63		63		83.5		106.8		
	3stage	64.4	78		78		104.7		132.9		
M	Ø32 or 36		Ø40		Ø40		Ø52		Ø65		
X	M3 or M4, DP 8		M5, DP 7.5		M5, DP 7.5		M5, DP 10		M6, DP 16		
Y	-		-		-		-		M6, DP 18		
Z	Woodruff key		Woodruff key		Woodruff key		Parallel key		Parallel key		
G	15W	70	40W	95	45/50W	94.5	45/50W	94.5	120W	135	
	20W	85	60W	125	75/100W	124.5	75/100W	124.5	220W	175	
H	2		2		2		2		2		
J	Ø25		Ø25		Ø25		Ø25		Ø25		
K	Ø42		Ø52		Ø63		Ø63		Ø80		
L	1stage	137.8/152.8		169.5/199.5		169/199		190.7/220.7		266.7/306.7	
	2stage	149.6/164.6		185/215		184.5/214.5		212/242		292.8/332.8	
	3stage	161.4/176.4		200/230		199.5/229.5		233.2/263.2		318.9/358.9	



■ OPTIONS

■ Encoder

Magnet Encoder Modules

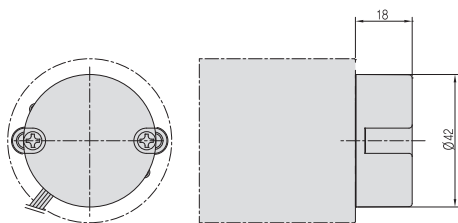

Optical Encoder Modules

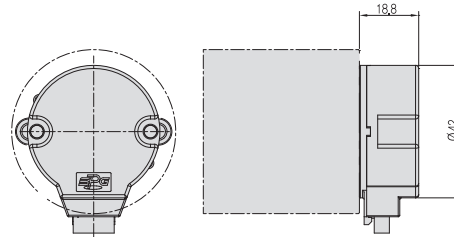
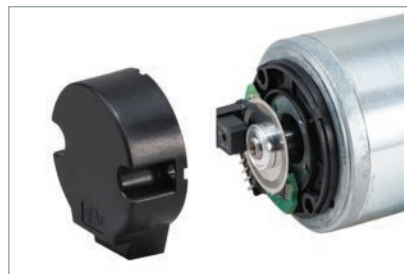


Model		Magnet Encoder Modules			Optical Encoder Modules		
		SEC 6-2	SEC 6-6	SEC 6-12	SEC 5-100	SEC 5-200	SEC 5-1000
Resolution	[ppr]	2	6	12	100	200	1000
Operating voltage	[Vdc]	12 (5 ~ 24)			5		
Pull-up resistor	-	Yes					
Output signal	-	2 square-wave signals of phase 90°					
Operating temperature	[°C]	-40 ~ 85					

※ This encoder is only available on request

■ OPTIONS

■ Electric brake(Power-off type)



Model		#01	#02	#03	#04
Diameter "Ø"	[mm]	37	47	56	65
Length "L"	[mm]	32.1	30.2	31.8	31.7
Operating voltage	[Vdc]	24			
Braking torque	[Nm]	0.24	0.5	1	2
Turn on time	[s]	0.01	0.01	0.035	0.040
Turn off time	[s]	0.01	0.01	0.020	0.025

※ This power-on brake is only available on request



SPG SPG Co., Ltd.

<http://www.spg.co.kr>

■ SPG 45, Cheongneung-daero, 289beon-gil, Namdong-gu, Incheon, Korea (67B 12L, Namdong complex, Gojan-dong) TEL : 82-32-820-8200 FAX : 82-32-821-0383
Sales Division TEL : 82-32-821-7090 FAX : 82-32-821-0383

■ SPG USA INC.
501 Lively Blvd Elk Grove Village, IL 60007, USA TEL : 1-847-439-4949 FAX : 1-847-439-4940