



OPTIONS



VERSIONS

Type	Current per Winding A	Holding Torque Ncm	Resistance per Winding Ohm	Inductance per Winding mH	Rotor Inertia gcm ²	Weight kg	Length „A“ mm
SC6018L4204	4.2	354	0.65	3.2	840	1.4	100

ORDER IDENTIFIER

SC6018L4204-
ENO05K = 5V Encoder Supply Voltage
ENO24K = 24V Encoder Supply Voltage




ACCESSORIES



ZK-NOE1-10-500-S Encoder Cable
ZK-JST-VHR-6N-0.5M-S Connection cable
ZK-JST-VHR-6N-2M-S Connection cable

DIMENSIONS (IN MM)

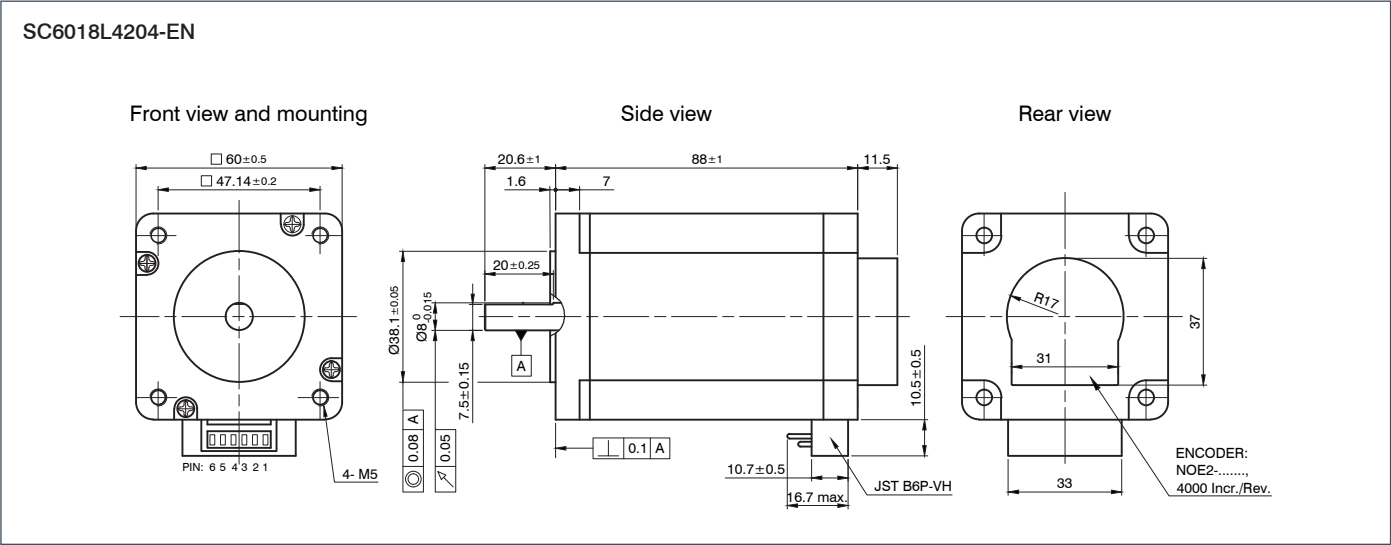

TORQUE CURVES

