




Front view and mounting

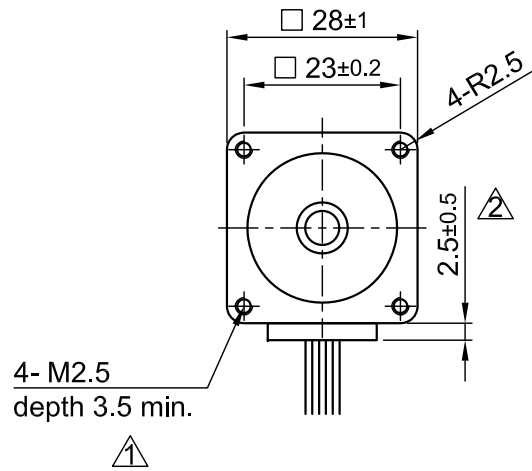

Side view

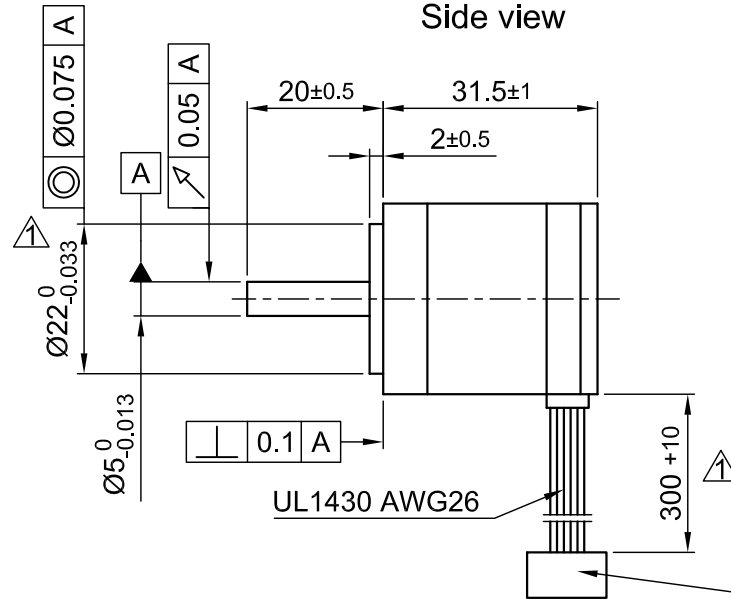


Rear view



Connector Type: JST XHP-6  
Contact: SXH-001T-P0.6

SPECIFICATION	UNIPOLAR OR BIPOLAR-1 WINDING	BIPOLAR SERIES
VOLTAGE (VDC)	2.66	3.75
AMPS/PHASE	0.95	0.67
RESISTANCE/PHASE (Ohms)@25°C	2.8±15%	5.6±15%
INDUCTANCE/PHASE (mH) @1KHz	1.0±20%	4.0±20%
HOLDING TORQUE (Nm) [lb-in]	0.043 [0.381]	0.061 [0.538]
DETENT TORQUE (Nm) [lb-in]	2.5x10 <sup>-3</sup> [0.0222]	
STEP ANGLE (°)	1.8	
STEP ACCURACY (NON-ACCUM)	±5%	
ROTOR INERTIA (Kg-m <sup>2</sup> ) [lb-in <sup>2</sup> ]	9x10 <sup>-7</sup> [3.074x10 <sup>-3</sup> ]	
WEIGHT (Kg) [lb]	0.11 [0.242]	

PERMISSIBLE RADIAL+AXIAL FORCE

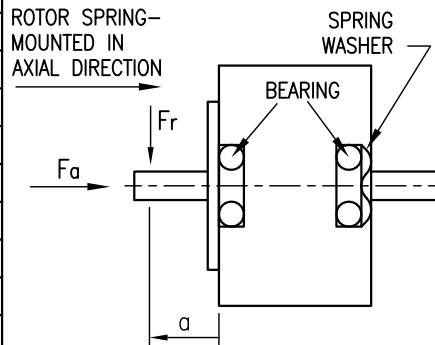


TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)	AXIAL-FORCE Fa (N)	Fa=7			
AMBIENT TEMPERATURE -10~ 50°C [14°F ~ 122°F]	DISTANCE a (mm)	5	10	15	20
INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)	RADIAL-FORCE Fr (N)	58	36	26	20
INSULATION CLASS B 130° [266°F]		AXIAL		RADIAL	
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	SHAFT PLAY (mm)	0.075		0.025	
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)	AT LOAD MAX: (N)	10		5.0	

TYPE OF CONNECTION (EXTERN)			MOTOR		
UNIPOLAR	BIPOLAR		CONNECTOR PIN NO.	LEADS	WINDING
	1WINDING	SERIES			
A ---	A ---	A ---	1	BLK	A
COM ---	COM ---	---	5	YEL	
A\ ---	---	A\ ---	3	GRN	A\
B ---	B ---	B ---	2	RED	B
COM ---	COM ---	---	6	WHT	
B\ ---	---	B\ ---	4	BLU	B\

for >speed ←  
for <speed ←

FULL STEP 2 PHASE-Ex.,  
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\	CCW	CW
1	+	+	-	-	↓	↑
2	-	+	+	-	↓	↑
3	-	-	+	+	↓	↑
4	+	-	-	+	↓	↑

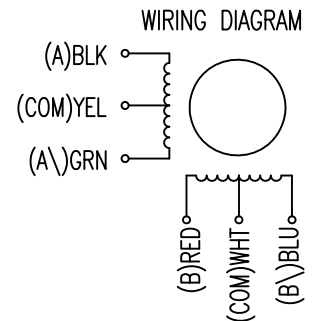

REV	DESCRIPTION	DATE	DRN
2	change tolerance/ revise drawing	11.01.17	A.S.
1	CHANGE TOL. M2.5/Ø22/ rework draw	16.12.15	A.S.



Surface specification	General tolerances	Work piece edge
DIN ISO 1302	DIN ISO 2768- cH	DIN ISO 13715

APVD	G.S.	21.02.14
CHKD		
DRN	J.D.	21.02.14
SIGNATURE		DATE

STEPPING MOTOR

DWG.NO

ST2818S1006-A