



### OPTIONS



### VERSIONS

Type	Current per Winding A	Holding Torque Ncm	Resistance per Winding Ohm	Inductance per Winding mH	Rotor Inertia gcm <sup>2</sup>	Weight kg	Length „A“ mm
ST8918S4508	3.18	353.55	0.6	1.9	1000	1.7	65
ST8918M4508	3.18	593.97	0.66	3	1900	2.8	96
ST8918M6708	4.74	593.97	0.45	2.6	1900	2.8	96
ST8918L4508	3.18	933.38	1.1	6.3	3000	3.95	126
ST8918L6708	4.74	933.38	0.54	2.7	3000	3.95	126
ST8918D6708	4.74	1202.08	0.75	4.9	4000	5.4	156

The current and holding torque values refer to bipolar serial wiring. The resistance and inductance values refer to unipolar wiring.


### ORDER IDENTIFIER

**ST8918S4508-**

A = single shaft

B = double shaft

### DIMENSIONS (IN MM)

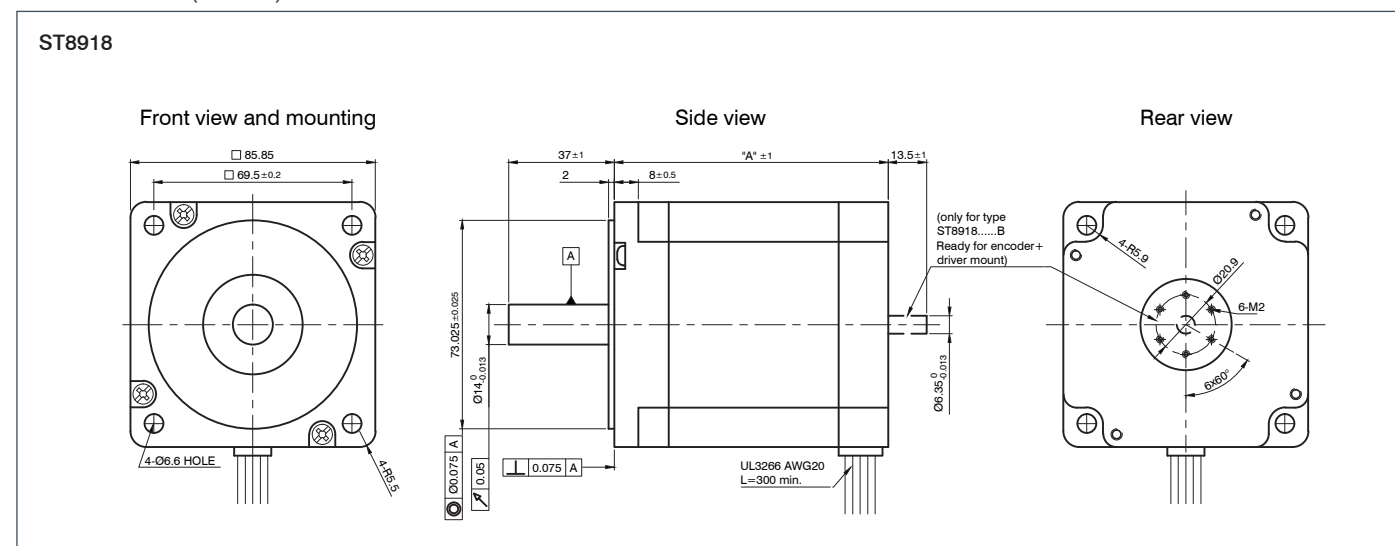

### TORQUE CURVES

