




Front view and mounting

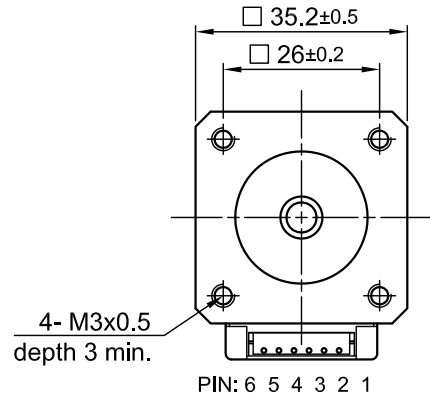

Side view

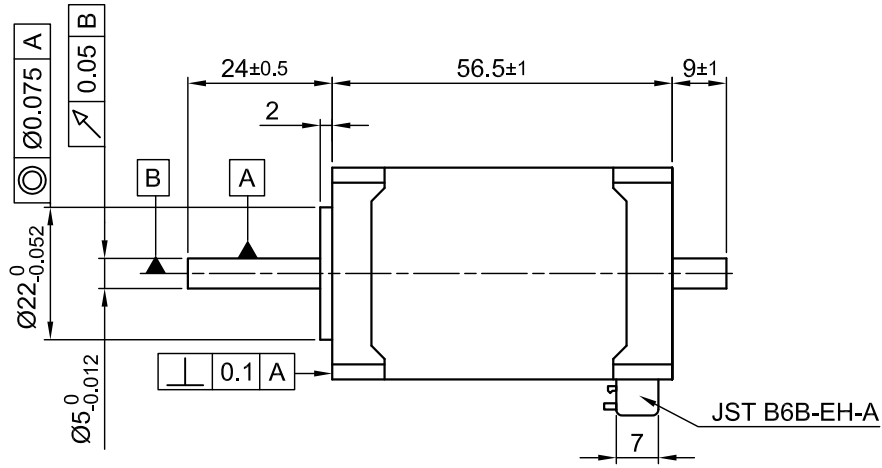


Rear view

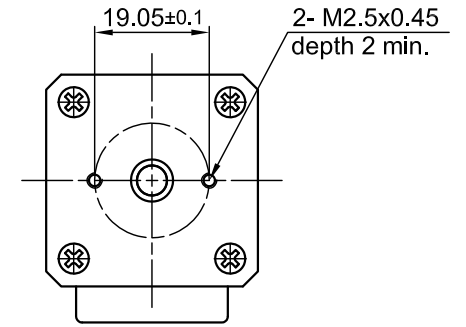


CONNECTION	BIPOLAR SERIES
SPECIFICATION	
VOLTAGE (VDC)	4.56
AMPS/PHASE	1.2
RESISTANCE/PHASE (Ohms)@25°C	3.8±10%
INDUCTANCE/PHASE (mH) @1KHz	5.2±20%
HOLDING TORQUE (Nm) [lb-in]	0.32 [2.832]
DETENT TORQUE (Nm) [lb-in]	TBD
STEP ANGLE (°)	1.8
ACCURACY (NON-ACCUM)	±5%
ROTOR INERTIA (Kg-m ²) [lb-in ²]	4.3x10 ⁻⁶ [0.015]
WEIGHT (Kg) [lb]	0.3 [0.7]
TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)	
AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F]	
INSULATION RESISTANCE 100 MΩ (UNDER NORMAL TEMPERATURE AND HUMIDITY)	
INSULATION CLASS B 130° [266°F]	
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)	

PERMISSIBLE RADIAL+AXIAL FORCE				
ROTOR SPRING-MOUNTED IN AXIAL DIRECTION				
AXIAL-FORCE Fa (N)	Fa=7			
DISTANCE a (mm)	5	10	15	20
RADIAL-FORCE Fr (N)	58	36	26	20
	AXIAL	RADIAL		
SHAFT PLAY (mm)	0.08	0.02		
AT LOAD MAX: (N)	4.5	4.5		

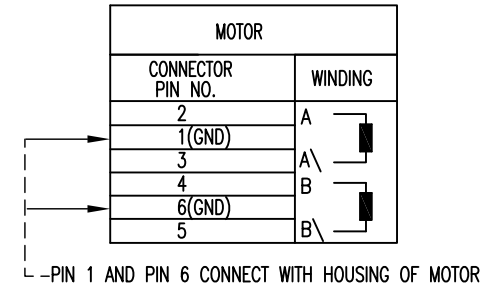

FULL STEP 2 PHASE-Ex., WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\	CCW	CW
1	+	+	-	-	↓	↑
2	-	+	+	-	↑	↓
3	-	-	+	+	↓	↑
4	+	-	-	+	↑	↓



				Nanotec [®] PLUG & DRIVE			APVD	G.S.	22.04.15	STEPPING MOTOR
							CHKD			
							DRN	A.S.	22.04.15	DWG.NO
REV	DESCRIPTION	DATE	DRN	Surface specification DIN ISO 1302	General tolerances DIN ISO 2768- cH	Work piece edge DIN ISO 13715	SIGNATURE		DATE	SC3518L1204-B