


Connector: JST B6P-VH

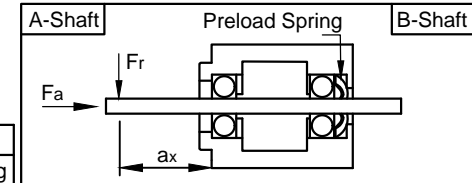

| | | |
|--|----|------|
| Max. Axial Force F_a | N | 15 |
| Max. Radial Force F_r ($a_2 = 20$ mm) | N | 75 |
| Axial Play $F_a = 4.0$ N | mm | 0.08 |
| Radial Play $F_r = 4.0$ N | mm | 0.02 |

| TYPE OF CONNECTION | | |
|--------------------|---------|----------|
| Bipolar | Pin No. | Winding |
| A | 1 | [Symbol] |
| A\ | 3 | |
| B | 4 | [Symbol] |
| B\ | 6 | |

| MOTOR SPECIFICATION | | |
|------------------------------|-------------------|-----------------------|
| Voltage | V DC | 1.5 |
| Current per Winding | A | 4.2 |
| Resistance per Phase (25°C) | ±15% Ω | 0.35 |
| Inductance per Phase (1 kHz) | ±20% mH | 0.8 |
| Holding Torque | Nm | 0.6 |
| Step Angle | ±5% ° | 1.8 |
| Rotor Inertia | kg m ² | 12 x 10 ⁻⁶ |

| GENERAL MOTOR SPECIFICATION | | |
|--|------|------------|
| Ambient Temperature | °C | -20 ... 50 |
| Max. Temperature Rise (at standstill - 2 phases energized) | °C | 80 |
| Max. Ambient Humidity (non condensing) | % | 85 |
| Insulation Class | | B |
| Insulation Resistance | MΩ | 100 |
| Dielectric Strength (for 1 min - coil to case) | V AC | 500 |

| ISO 8015 | ISO 1302 | ISO 2768 cK | ISO 13715 |
|----------|-----------|-------------|-------------------------|
| | | Date | Name |
| | | Drawn | 20.12.2018 Schneid_A |
| | | Checked | 20.12.2018 Knoll_J |
| | | Approved | ---- |
| REV | Rev. Text | Name | Rel. Date |

Weight: 0.45 kg

SCA5618X4204-B

01200258

State: Sample Rev: - P