



OPTIONS



VERSIONS

Type	Force N	Speed mm/s	Current per Winding A	Resolution $\mu\text{m}/\text{step}$	Resistance per Winding Ohm	Thread Diameter mm	Thread Lead mm	Stroke Length „X“ mm	Housing Length „B“ mm	Length „A“ mm	Weight kg
L5918S2008-T10x2-A	800	70	2	10	1.5	10	2	25 - 50	47/72	51	0.8 - 0.85
L5918S2008-T10x6-A	500	130	2	30	1.5	10	6	25 - 50	47/72	51	0.8 - 0.85
L5918L3008-T10x2-A	1000	80	3	10	1	10	2	25 - 50	47/72	76	1.15 - 1.2


ORDER IDENTIFIER

L5918S2008-T10X2-
 A25 = 25 mm stroke length „X“
 A50 = 50 mm stroke length „X“

CAUTION

The force and output power ratings listed in the data sheets are based on a duty cycle of approx. 10% to 20% and must be reduced for higher values. Moving against fixed limit stops should be avoided.

DIMENSIONS (IN MM)

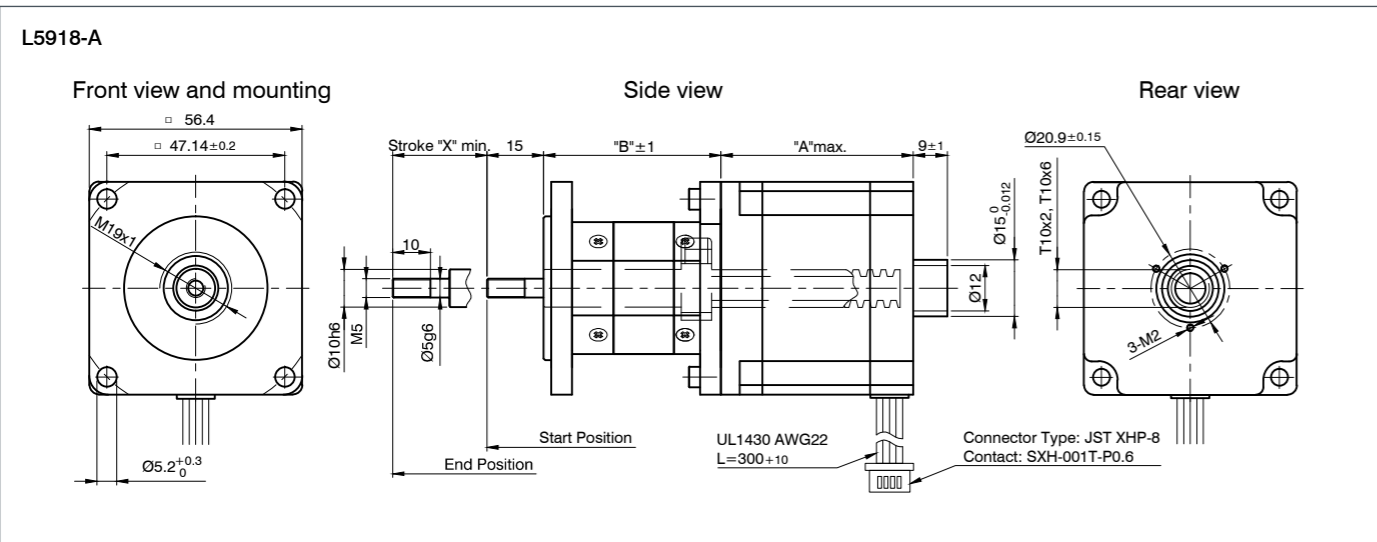

FORCE-VELOCITY CURVES

