



OPTIONS



VERSIONS

Type	Force N	Speed mm/s	Current per Winding A	Resolution µm/step	Resistance per Winding Ohm	Thread Diameter mm	Thread Lead mm	Length „A“ mm	Weight kg
LS5918S2008-T10X2-75	800	70	2	10	1.5	10	2	51	0.85
LS5918S2008-T10X6-75	500	130	2	30	1.5	10	6	51	0.85

ACCESSORIES



CAUTION




LSNUT-T10X2-F Threaded Nut - PEEK
LSNUT-T10X6-F Threaded Nut - PEEK

The force and output power ratings listed in the data sheets are based on a duty cycle of approx. 10% to 20% and must be reduced for higher values. Moving against fixed limit stops should be avoided.

DIMENSIONS (IN MM)

LS5918

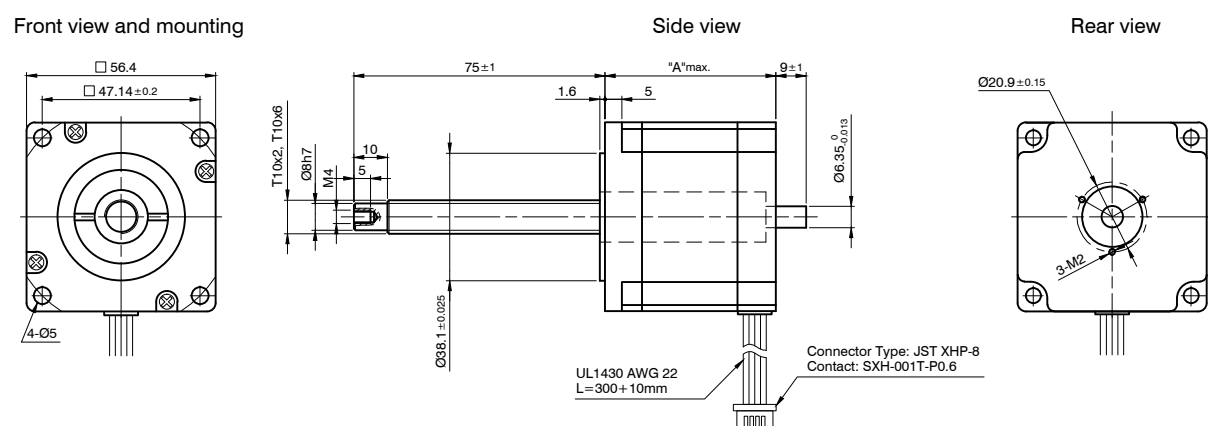

FORCE-VELOCITY CURVES

