



VERSIONS

Type	Force N	Speed mm/s	Current per Winding A	Resolution µm/step	Resistance per Winding Ohm	Inductance per Winding mH	Thread Diameter mm	Thread Lead mm	Length „A“ mm	Socket Length „L“ mm	Weight kg
LA201S06-A-TDBA	46	40	0.6	5	6.4	2.6	3.5	1	33	8	0.054
LA201S06-B-TDBA	46	40	0.6	5	6.4	2.6	3.5	1	33	8	0.054

ACCESSORIES

- ZST3,5-1-200-1
Lead Screw with Trapezoidal Thread
- ZST3,5-1-500
Lead Screw with Trapezoidal Thread
- NANOLUBE-50G Lubricant



CAUTION


The force and power ratings specified in the data sheets are based on a duty cycle of 10% to 20% and must be reduced for higher values. Moving against fixed end stops should be avoided.




ORDER IDENTIFIER

LA201S06-
A-... = single shaft end
B-... = double shaft end

DIMENSIONS (IN MM)

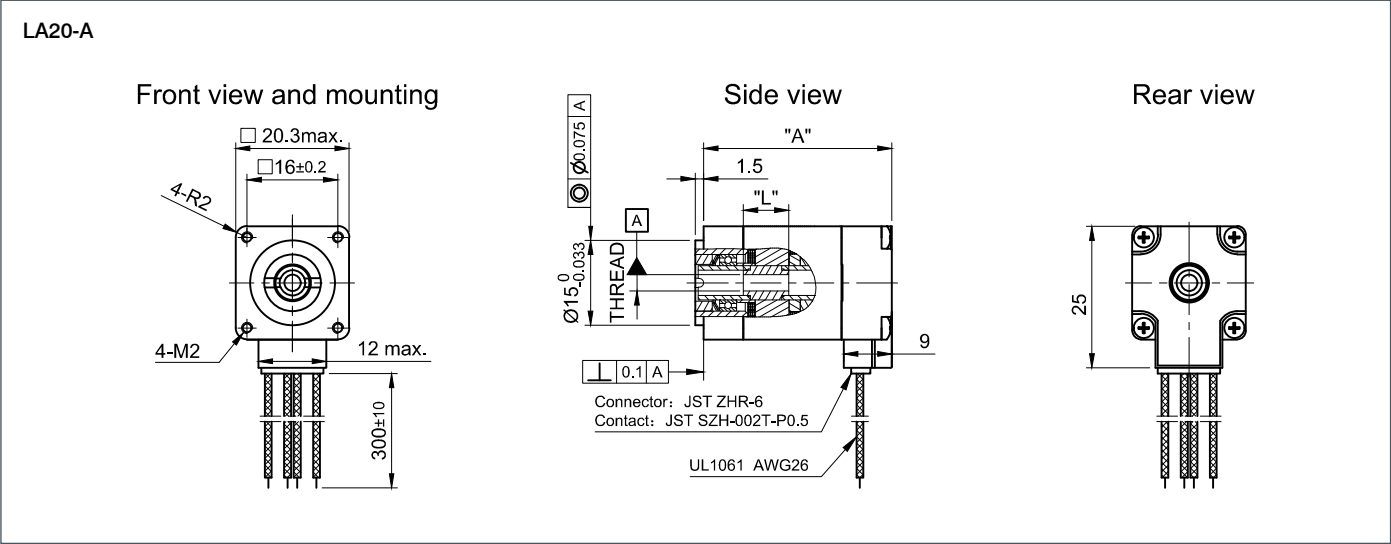

DIMENSIONS (IN MM)

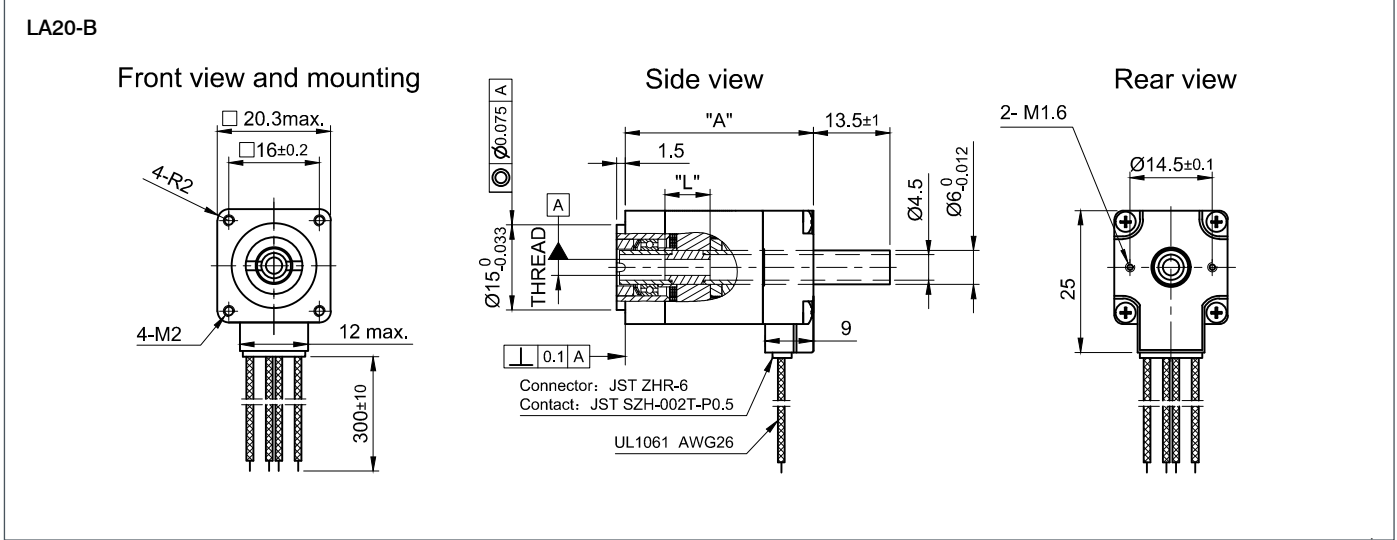

FORCE-VELOCITY CURVES

