



VERSIONS

Type	Force N	Speed mm/s	Current per Winding A	Resolution $\mu\text{m}/\text{step}$	Resistance per Winding Ohm	Inductance per Winding mH	Thread Diameter mm	Thread Lead mm	Screw Length „L“ mm	Length „A“ mm	Weight kg
LSA201S06-A-TDBA-102	46	40	0.6	5	6.4	2.6	3.5	1	102	33	0.054
LSA201S06-B-TDBA-102	46	40	0.6	5	6.4	2.6	3.5	1	102	33	0.054

ACCESSORIES

- LSNUT-AAAA-TDBA Threaded Nut – POM
- LSNUT-ZERO3,5X1 Pre-Loaded Threaded Nut - PEEK
- NANOLUBE-50G Lubricant




CAUTION




The force and power ratings specified in the data sheets are based on a duty cycle of 10% to 20% and must be reduced for higher values. Moving against fixed end stops should be avoided.

DIMENSIONS (IN MM)

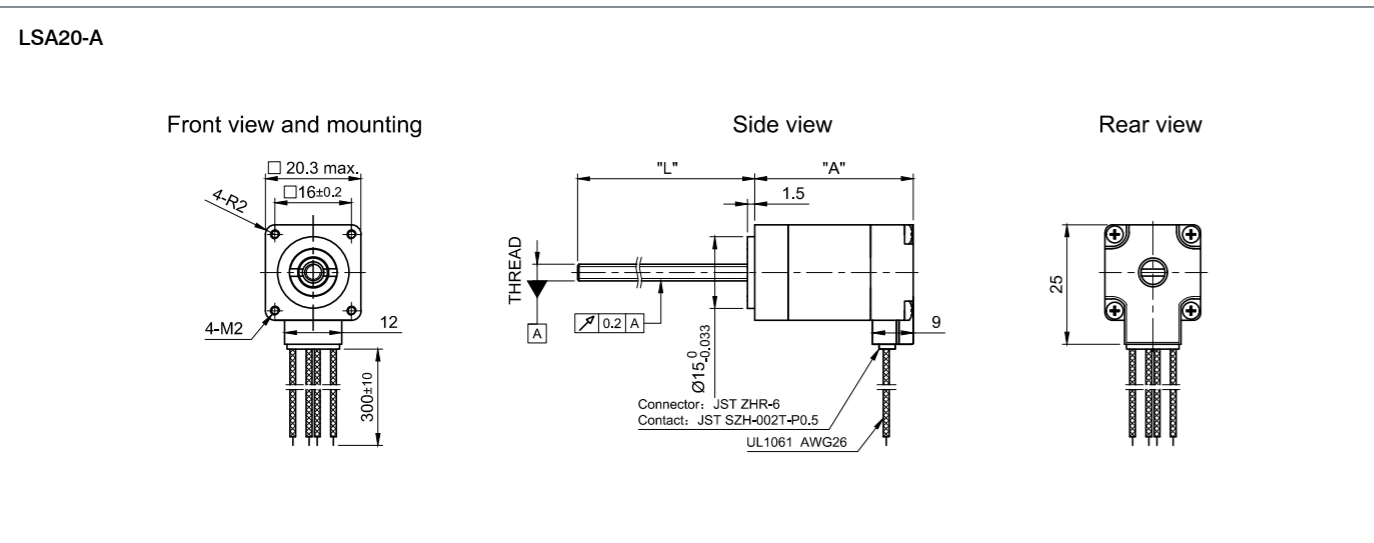

DIMENSIONS (IN MM)

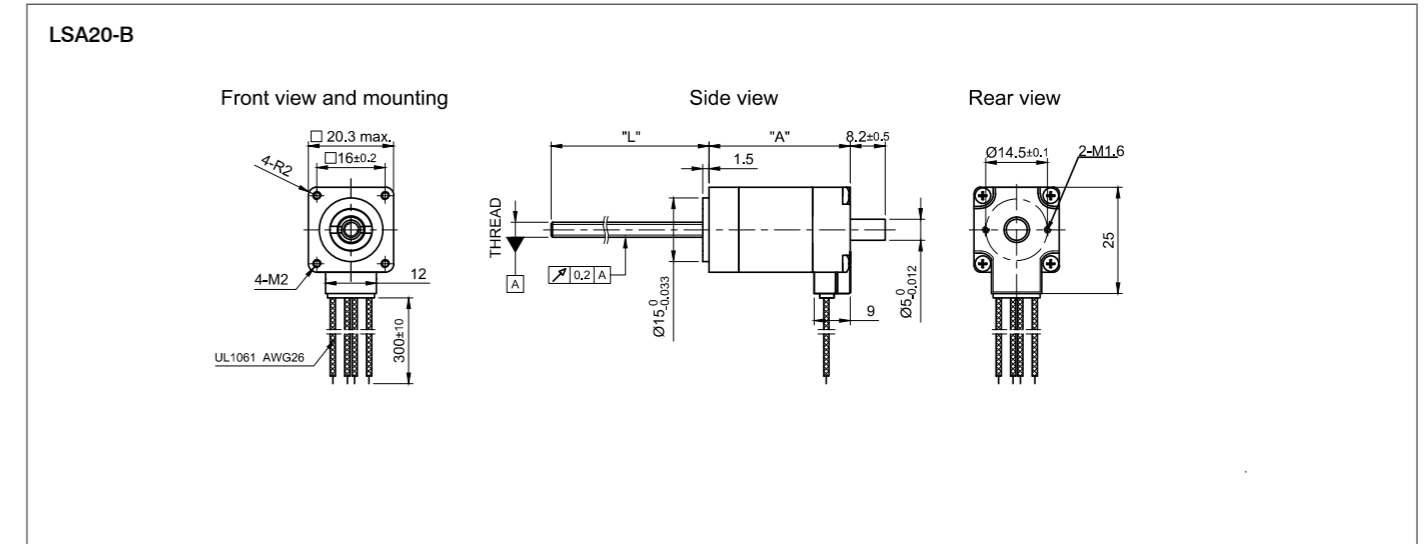

FORCE-VELOCITY CURVES

