



OPTIONS



VERSIONS


Type	Force N	Speed mm/s	Current per Winding A	Resolution µm/step	Resistance per Winding Ohm	Inductance per Winding mH	Thread Lead mm	Screw Length mm	Length „A“ mm	Weight kg
LSP1518M0104-M2X0,4	3	20	0.071	20	170	28	0.4	19.5	11	0.013
LSP2575M0506-M2X0,4	10	15	0.5	8.3	10	2	0.4	28.5	15	0.0312
LSP3575M0206-M3X0,5	40	10	0.22	10	60	45	0.5	28.5	22	0.094
LSP4275M0206-M3X0,5	50	10	0.18	10	70	50.5	0.5	28.5	22	0.134

CAUTION



The force and output power ratings listed in the data sheets are based on a duty cycle of approx. 10% to 20% and must be reduced for higher values. Moving against fixed limit stops should be avoided.

DIMENSIONS (IN MM)

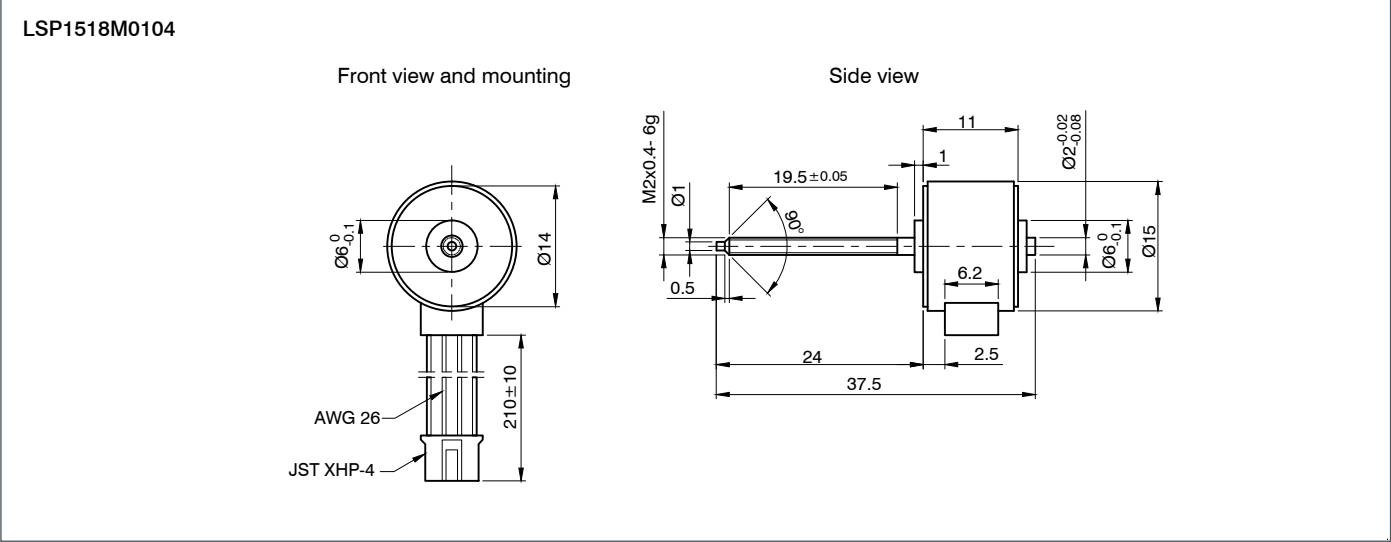

DIMENSIONS (IN MM)

