



OPTIONS



DESCRIPTION

2-phase, high-torque stepper motor in size NEMA 11 (28mm) with a step angle (full step) of 1.8° in protection class IP65 (except shaft outlet). Because they have the same flange size as the standard motor ST2818, these motors are electrically and mechanically interchangeable.

VERSIONS

Type	Current per Winding A	Holding Torque Ncm	Resistance per Winding Ohm	Inductance per Winding mH	Rotor Inertia gcm ²	Weight kg	Length „A“ mm
AS2818S0604	0.67	7.1	5.6	4	9	0.13	51
AS2818L0604	0.67	12.7	9.2	7.2	18	0.22	70


ORDER IDENTIFIER

AS2818S0604

ACCESSORIES

- ZK-M12-5-2M-1-PUR-S M12 Cable
- ZK-M12-5-2M-2-PUR-S M12 Cable
- ZK-M12-5-5M-1-PUR-S M12 Cable
- ZK-M12-5-5M-2-PUR-S M12 Cable
- ZK-M12-8-2M-1-PUR-S M12 Cable
- ZK-M12-8-2M-2-PUR-S M12 Cable
- ZK-M12-8-5M-1-PUR-S M12 Cable
- ZK-M12-8-5M-2-PUR-S M12 Cable

DIMENSIONS (IN MM)

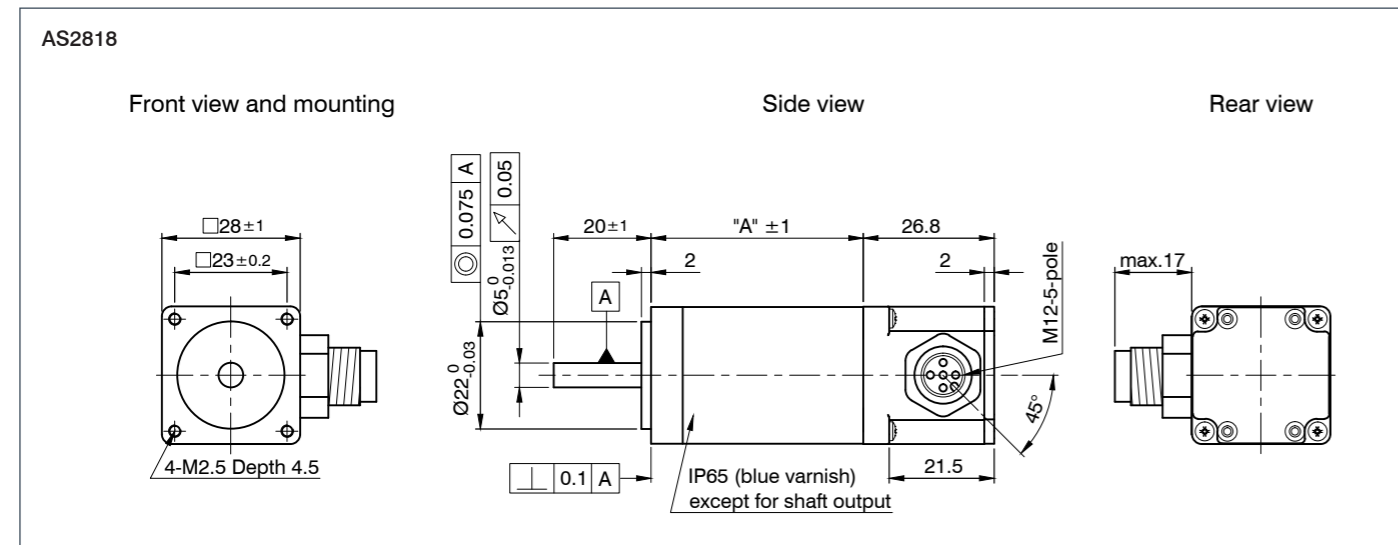

TORQUE CURVES

